FK

Dimensions in mm.

Material: Galvanized steel





Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.


General Data


Designation	Description	Compatible with	Fmax (N)	Mass (kg)
FK 32 - 5466	FK 32	PNCE 32	F PNCE	0.22
FK 40 - 5468	FK 40	PNCE 40	5000	0.23
FK 50 - 5470	FK 50	PNCE 50	10000	0.66
FK 63 - 5470	FK 63	PNCE 63	10000	0.66
FK 80 - 5471	FK 80	PNCE 80	10000	0.7
FK 100 - 5471	FK 100	PNCE 100	10000	0.7

Dimensions







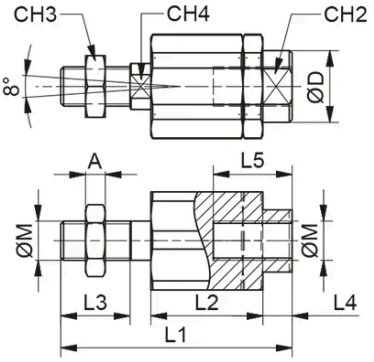

Designation	M	L1	L2	L3	L4	L5	L6	A	D
FK 32 - 5466	Ø M10 × 1.25	71	35	20	11	23	Ø 32	6	Ø 22
FK 40 - 5468	Ø M12 × 1.25	75	35	24	11	23	Ø 32	7	Ø 22
FK 50 - 5470	Ø M16 × 1.5	103	54	32	9	32	Ø 45	8	Ø 32
FK 63 - 5470	Ø M16 × 1.5	103	54	32	9	32	Ø 45	8	Ø 32
FK 80 - 5471	Ø M20 × 1.5	119	54	40	17	39	Ø 45	9	Ø 32
FK 100 - 5471	Ø M20 × 1.5	119	54	40	17	39	Ø 45	9	Ø 32

Designation	CH1	CH2	CH3	CH4
FK 32 - 5466	30	19	17	12
FK 40 - 5468	30	19	19	12
FK 50 - 5470	41	27	24	20
FK 63 - 5470	41	27	24	20
FK 80 - 5471	41	27	30	20
FK 100 - 5471	41	27	30	20

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.