PSD 41 - Shaft 8 mm hollow



• Software features: spindle compensation drive, increased breakaway performance, synchronized run
• Software modules for IO-Link: changeover of parameter set, target speed in process data and modulo function
• Protection of internal electronics against manual operation
• Space-saving, compact design
• Optional rotatable actuator housing
• Galvanically separated supply voltages between control and motor and bus
• Precise position feedback thanks to an absolute measurement system without battery
• Optional gearbox for more torque
• Address may be set using the bus or an address switch (not for IO-Link)
• Status LEDs visible from the outside

Self-holding torque below at approx. 60 mA supply current and 0.5 A phase current, currentless 0 Nm.

Dimensions in mm.


See link Manual(s) for documentation and software.

Contact us for CAD-files.

Type: Vertical
Nominal Voltage (V DC): 24 (± 10 %)
Nominal Current (A): 2.0
Output Shaft (mm): 8
Output Shaft Type: Hollow
Rotation Shaft / Housing: Direct or 0°; 90°; 180°; 270°
BUS Communication: Can Open (CA); IO-Link (IO); ProfiNet (PN); EtherCat (EC); Ethernet IP (EI)
Electrical connection: 0: Standard
Protection Class: IP50; IP65
Motor: Stepper motor
Supply Voltage: 24 V DC ± 10 % galvanically separated between motor and control
Measurement System: Absolute without battery
Accuracy: "±0.7 ° for versions with gearbox; ± 1.8 ° for versions without gearbox"
Intermittence: Start-up duration up to 50%
Manual Adjustment: No
Brake: No


Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

Performance Curve - Direct Drives PSD

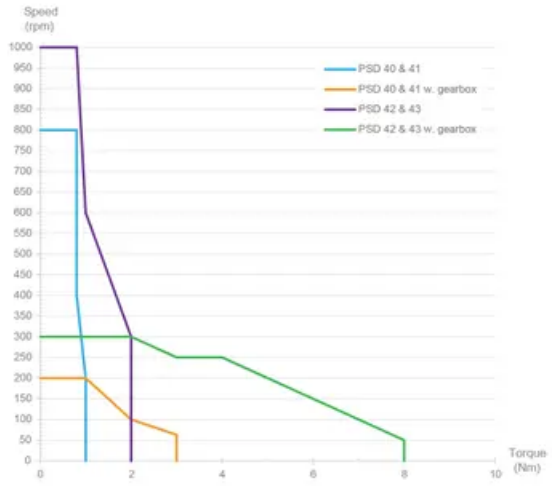


General Data

PSD 411-8H (hollow shaft, 1 Nm)

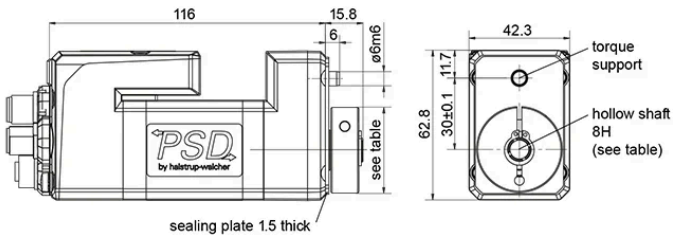

PSD 413-8H (hollow shaft, 3 Nm)

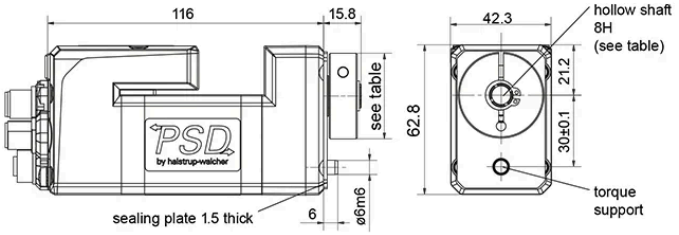

Hollow shaft	Tolerance	Plug depth	ø Clamp ring	Cylinder screw
ø8	H9	20	36	DIN 912 M4 x 16

Designation	Nominal Torque (Nm)	Nominal Speed (rpm)	Nominal Current (A)	Self-holding Torque (Nm)	Max. Speed (rpm)
PSD 411-8H	0.8	200	2.0	0.4	500
PSD 413-8H	3	50	2.0	1.5	200

Designation	Positioning Range (rot.)
PSD 411-8H	4026
PSD 413-8H	986

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.