

ASN63

Partial extension consisting of a guide rail and a slider. This compact size and simple design allow very high load capacities. The high system rigidity is formed in connection with the adjacent construction.

Special strokes are defined as deviations from standard stroke H. See section "Special strokes" in the document Technical Information for Telescopic Rail Heavy.

Dimensions in mm.


System Load Capacity Radial, System Load Capacity Axial, System Moment Capacity M_y and System Moment Capacity M_z values refers to a pair of rails.

M_x moment value refers to a single rail. The M_x system capacity depends on the width of the system and the load capacity radial.


See Technical Information for further details, operating conditions and installation instructions.



General Data

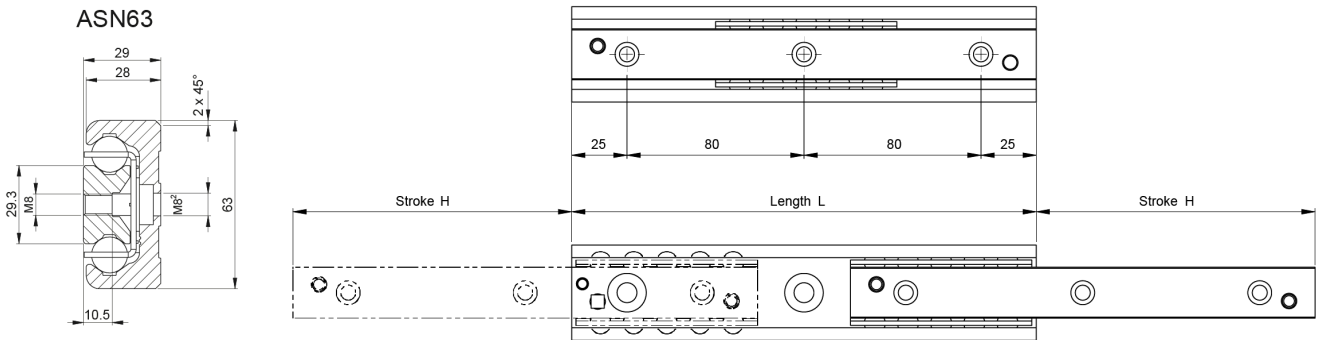

² Fixing holes for socket cap screws according to DIN 7984.

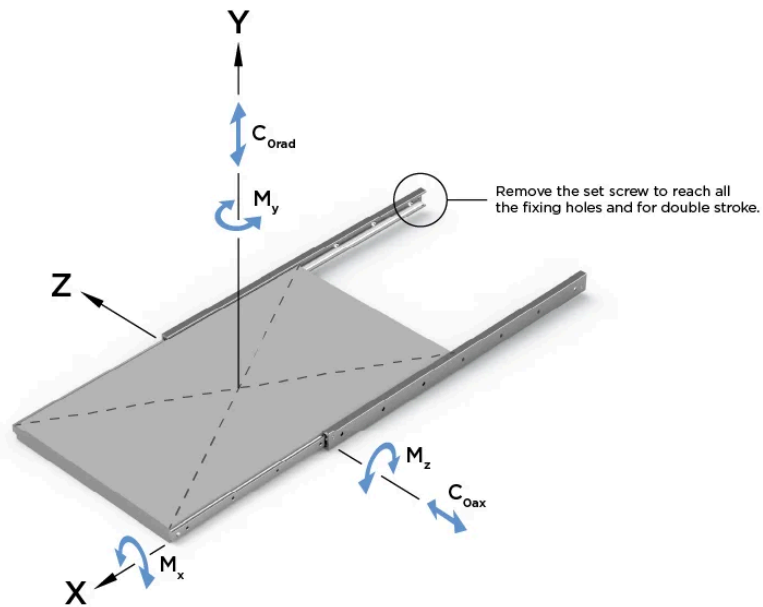

| Designation | Length | Stroke | Weight (kg/m) | System Load Capacity Radial (N) | System Load Capacity Axial (N) |
|-------------|--------|--------|---------------|---------------------------------|--------------------------------|
| ASN63-610 | 610 | 333 | 10.3 | 21182 | 14828 |
| ASN63-690 | 690 | 373 | 10.3 | 25068 | 17548 |
| ASN63-770 | 770 | 413 | 10.3 | 28978 | 20284 |
| ASN63-850 | 850 | 453 | 10.3 | 32904 | 23032 |
| ASN63-930 | 930 | 493 | 10.3 | 36842 | 25790 |
| ASN63-1010 | 1010 | 533 | 10.3 | 40790 | 28554 |
| ASN63-1090 | 1090 | 573 | 10.3 | 44746 | 31322 |
| ASN63-1170 | 1170 | 613 | 10.3 | 48708 | 34096 |
| ASN63-1250 | 1250 | 653 | 10.3 | 52674 | 36872 |
| ASN63-1330 | 1330 | 693 | 10.3 | 56644 | 39650 |
| ASN63-1410 | 1410 | 733 | 10.3 | 60618 | 42432 |
| ASN63-1490 | 1490 | 773 | 10.3 | 64594 | 45216 |
| ASN63-1570 | 1570 | 813 | 10.3 | 68574 | 48002 |
| ASN63-1650 | 1650 | 853 | 10.3 | 72554 | 50788 |
| ASN63-1730 | 1730 | 893 | 10.3 | 76536 | 53576 |
| ASN63-1810 | 1810 | 933 | 10.3 | 80522 | 56364 |
| ASN63-1890 | 1890 | 973 | 10.3 | 84506 | 59154 |

| Designation | Length | Stroke | Weight (kg/m) | System Load Capacity Radial (N) | System Load Capacity Axial (N) |
|-------------|--------|--------|---------------|---------------------------------|--------------------------------|
| ASN63-1970 | 1970 | 1013 | 10.3 | 88494 | 61946 |

| Designation | System Moment Capacity My (Nm) | System Moment Capacity Mz (Nm) | Mx moment (Nm) | Number of Fixing Holes |
|-------------|--------------------------------|--------------------------------|----------------|------------------------|
| ASN63-610 | 3106 | 4438 | 474 | 8 |
| ASN63-690 | 4144 | 5920 | 547.5 | 9 |
| ASN63-770 | 5332 | 7616 | 621 | 10 |
| ASN63-850 | 6668 | 9526 | 294.5 | 11 |
| ASN63-930 | 8154 | 11648 | 768 | 12 |
| ASN63-1010 | 9788 | 13984 | 841.4 | 13 |
| ASN63-1090 | 11574 | 16534 | 914.9 | 14 |
| ASN63-1170 | 13508 | 19296 | 988.4 | 15 |
| ASN63-1250 | 15590 | 22272 | 1061.9 | 16 |
| ASN63-1330 | 17824 | 25462 | 1135.4 | 17 |
| ASN63-1410 | 20204 | 28864 | 1208.9 | 18 |
| ASN63-1490 | 22736 | 32480 | 1282.4 | 19 |
| ASN63-1570 | 25416 | 36310 | 1355.9 | 20 |
| ASN63-1650 | 28246 | 40352 | 1429.4 | 21 |
| ASN63-1730 | 31226 | 44608 | 1502.8 | 22 |
| ASN63-1810 | 34354 | 49078 | 1576.3 | 23 |
| ASN63-1890 | 37632 | 53760 | 1649.8 | 24 |
| ASN63-1970 | 41060 | 58656 | 1723.3 | 25 |