5030 - 100% Extension

An all steel 3 beam slide extending up to 100%. Carrying loads up to 190 kg per pair. The 5030 offers strength and durability in a compact envelope.
Standard lengths 300 to 1000 mm in 50 mm increments.



All dimensions in mm.


System Load Capacity value refers to a pair of rails at full extension.

* Outer beam: 2 holes in both ends.

Material: Cold-drawn steel profile, zinc plated
Extension: 100%

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.


General Data

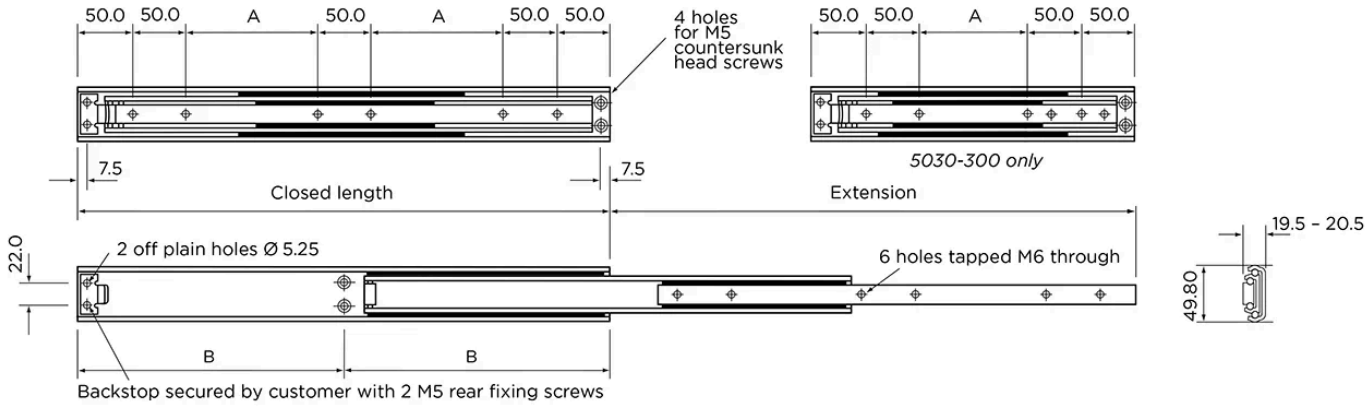

Designation	Closed Length	Extension Length	System Load Capacity (N)	Number of Fixing Holes	Weight/pc (kg)
5030-300	300	300	1900	4	1.3
5030-350	350	350	1830	6	1.52
5030-400	400	400	1750	6	1.9
5030-450	450	450	1650	6	2.1
5030-500	500	500	1550	6	2.33
5030-550	550	550	1450	6	2.56
5030-600	600	600	1370	6	2.8
5030-650	650	650	1250	6	3.03
5030-700	700	700	1180	6	3.22
5030-750	750	750	1050	6	3.48
5030-800	800	800	950	6	3.72
5030-850	850	850	830	6	3.98
5030-900	900	900	720	6	4.22
5030-950	950	950	600	6	4.44
5030-1000	1000	1000	500	6	4.66

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

Dimensions

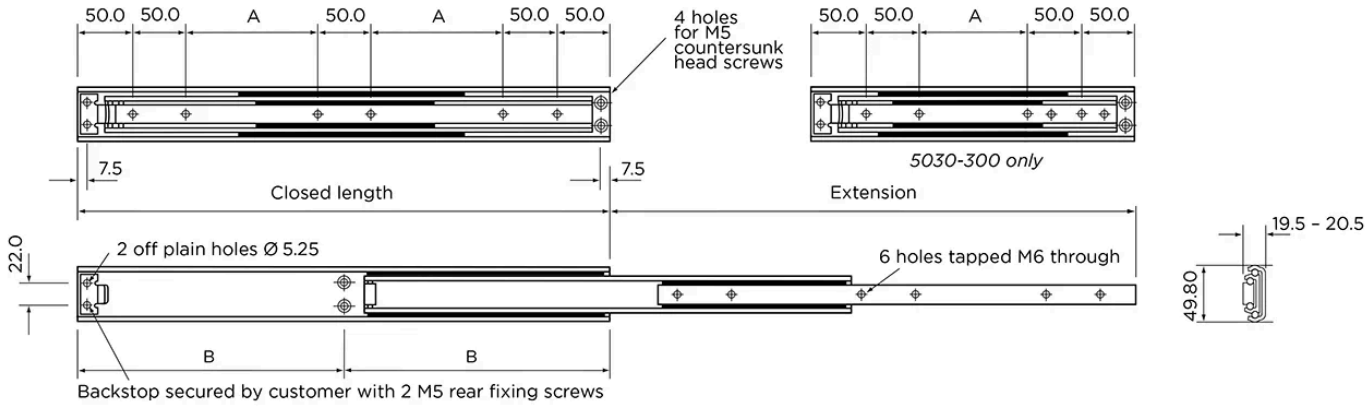

Designation	A	B
5030-300	100	150
5030-350	50	175
5030-400	75	200
5030-450	100	225
5030-500	125	250
5030-550	150	275
5030-600	175	300
5030-650	200	325
5030-700	225	350
5030-750	250	375
5030-800	275	400
5030-850	300	425
5030-900	325	450
5030-950	350	475
5030-1000	375	500

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.