

## Metal Bellows Coupling KM

- 6-corrugation bellows
- Simple installation with EASY-clamping hub
- Cost-effective standard series

Smaller couplings from 0.4 Nm - 12 Nm, see MKM.

Please note reduced tightening torque for bigger hub bore diameter - see also  $\varnothing D 1/2_{max}$ .

Tightening torque refers to screws.

Dimensions in mm. Length dimensions according to DIN ISO 2768 cH.

**Material:** Bellows: stainless steel Hubs: high-tensile strength aluminium Clamping screws: ISO 4762 - 12.9 Press-fit wire: brass

**Temperature range (°C):** -20° to +120°C




## General Data

| Designation | Nominal Torque (Nm) | Max. Torque (Nm) | Moment of inertia (10 <sup>-6</sup> kg*m <sup>2</sup> ) | Torsional stiffness (Nm/arcmin) | Axial max. shaft misalignment (mm) |
|-------------|---------------------|------------------|---|---------------------------------|------------------------------------|
| KM20        | 20                  | 40               | 0.14  | 5.2                             | 0.8                                |
| KM35        | 35                  | 70               | 0.14  | 5.8                             | 0.8                                |
| KM60        | 60                  | 120              | 0.29  | 8.7                             | 0.9                                |
| KM80        | 80                  | 160              | 0.79  | 14                              | 1                                  |
| KM170       | 170                 | 340              | 0.83  | 17                              | 1                                  |
| KM270       | 270                 | 540              | 2.2   | 32                              | 1                                  |
| KM400       | 400                 | 600              | 2.4   | 47                              | 1                                  |
| KM600       | 600                 | 900              | 5.3   | 67                              | 1                                  |
| KM900       | 900                 | 1800             | 9   | 105                             | 1                                  |
| KM1300      | 1 300               | 2600             | 14  | 170                             | 1                                  |

| Designation | Lateral max. shaft misalignment (mm) | Axial spring rate (N/mm) | Lateral spring rate (N/mm) | Tightening Torque (Nm) | Max. Speed (rpm) | Weight (kg) |
|-------------|--------------------------------------|--------------------------|----------------------------|------------------------|------------------|-------------|
| KM20        | 0.25                                 | 51                       | 190                        | 14                     | 20 000           | 0.3         |
| KM35        | 0.25                                 | 51                       | 190                        | 14                     | 20 000           | 0.3         |
| KM60        | 0.3                                  | 49                       | 260                        | 30                     | 17 000           | 0.41        |
| KM80        | 0.3                                  | 45                       | 280                        | 50                     | 14 000           | 0.8         |
| KM170       | 0.3                                  | 80                       | 470                        | 50                     | 14 000           | 0.8         |
| KM270       | 0.3                                  | 70                       | 450                        | 90                     | 11 000           | 1.4         |
| KM400       | 0.3                                  | 100                      | 640                        | 90                     | 11 000           | 1.5         |
| KM600       | 0.3                                  | 100                      | 980                        | 140                    | 9 000            | 2.4         |
| KM900       | 0.3                                  | 145                      | 1 000                      | 180                    | 8 500            | 3.3         |
| KM1300      | 0.3                                  | 130                      | 920                        | 240                    | 7 000            | 4.2         |

## Dimensions

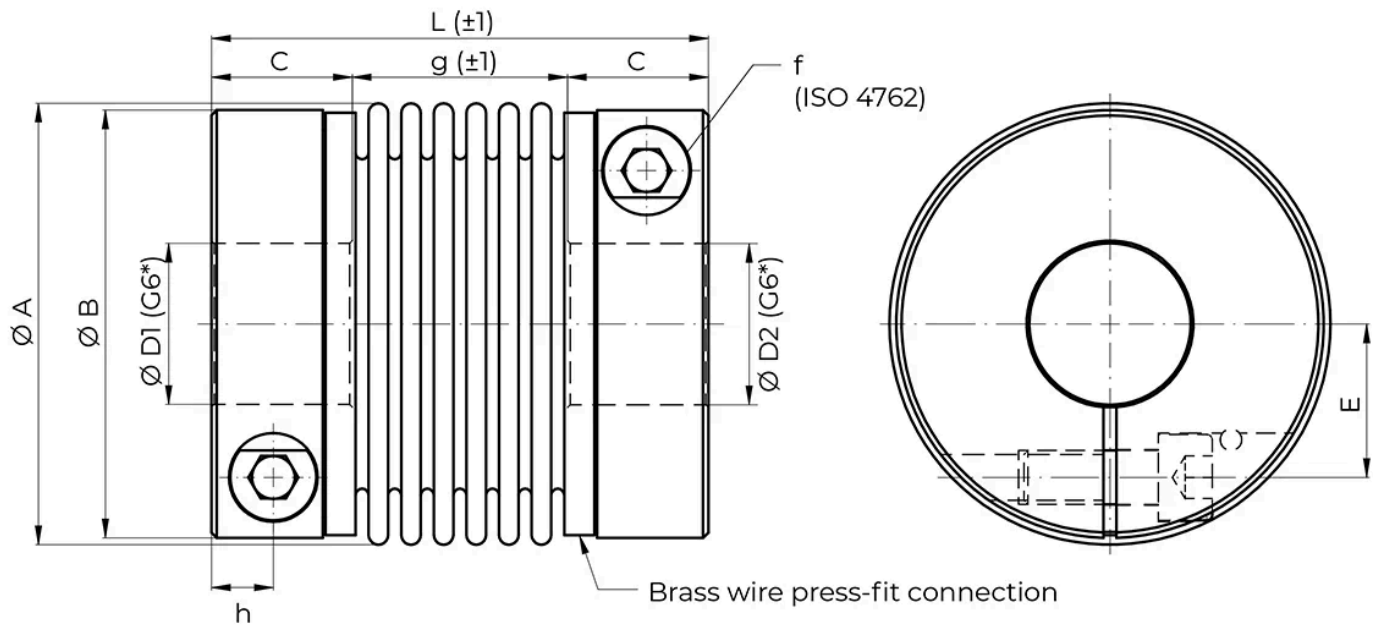

\*Other bore tolerances on request.

| Designation | Nominal Torque (Nm) | A          | B    | L   | C  | g  | f   | E    | ØD1/2 min. |
|-------------|---------------------|------------|------|-----|----|----|-----|------|------------|
| KM20        | 20                  | 56         | -    | 70  | 20 | 30 | M6  | 19   | 8          |
| KM35        | 35                  | 56         | -    | 70  | 20 | 30 | M6  | 19   | 10         |
| KM60        | 60                  | 66         | 63   | 77  | 22 | 33 | M8  | 22   | 13         |
| KM80        | 80                  | 82 (±0.8)  | 79.5 | 90  | 26 | 38 | M10 | 28.5 | 16         |
| KM170       | 170                 | 82 (±1)    | 79.5 | 92  | 26 | 40 | M10 | 28.5 | 18         |
| KM270       | 270                 | 101 (±1)   | 99   | 100 | 29 | 42 | M12 | 35   | 25         |
| KM400       | 400                 | 101 (±1)   | 99   | 106 | 29 | 48 | M12 | 35   | 28         |
| KM600       | 600                 | 122        | -    | 120 | 34 | 52 | M14 | 42   | 32         |
| KM900       | 900                 | 133        | -    | 143 | 45 | 53 | M14 | 47   | 40         |
| KM1300      | 1 300               | 157 (±1.5) | 145  | 145 | 45 | 55 | M16 | 54   | 48         |

| Designation | ØD1/2 max. |
|-------------|------------|
| KM20        | 32         |
| KM35        | 32         |
| KM60        | 35         |
| KM80        | 43         |
| KM170       | 43         |
| KM270       | 55         |
| KM400       | 55         |
| KM600       | 68         |
| KM900       | 75         |
| KM1300      | 85         |