

Steel Angle

Links two aluminium profiles at a right angle.

Note: To install the ESD-ready angles, use a notched slot nut in order to make a conductive link.


Mounting material On-site construction:


Angle 20: M5 × 8 countersunk screw (DIN7991), M5 slot 5 slot nut

Angle 30: M6 × 10 countersunk screw (DIN7991), M6 slot 6 slot nut


System: 30 - Slot 6; 20 - Slot 5

Type: Angles Brackets and Corners; Fasteners

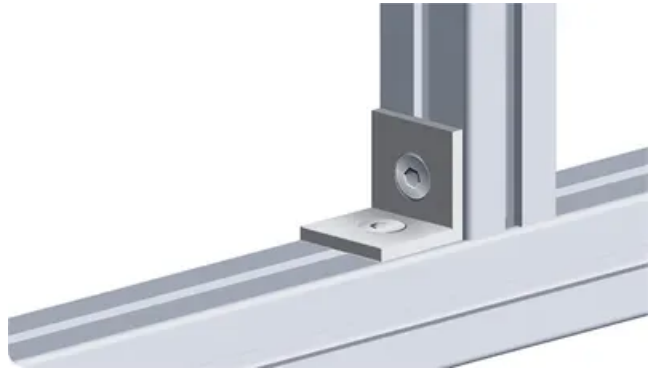

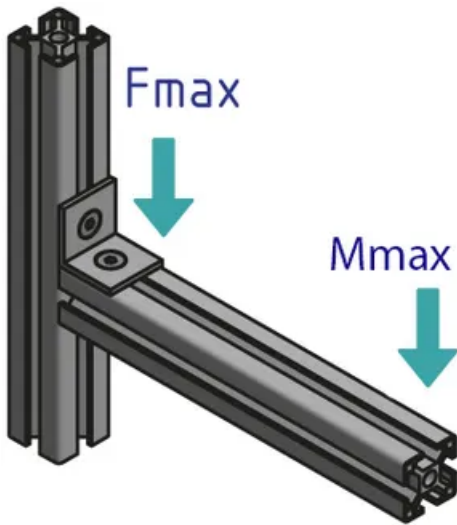

General Data

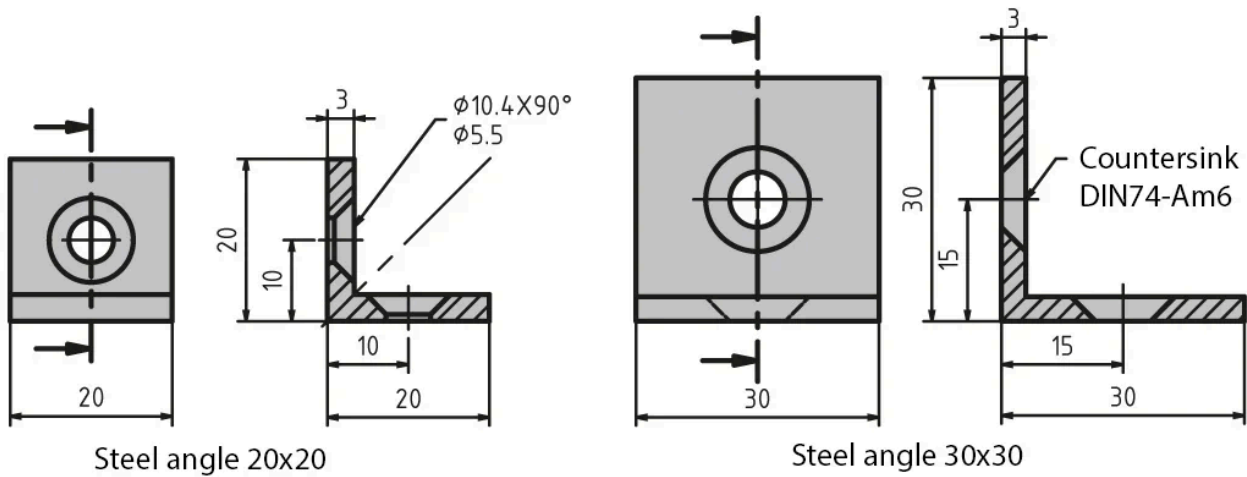

| Designation | System | Material | ESD | Fmax (N) | Mmax (Nm) |
|-------------|-------------|---------------------------|-----|----------|-----------|
| PZ4045 | 20 - Slot 5 | Black powder coated steel | - | 600 | 15 |
| PZ3060 | 30 - Slot 6 | Steel, blue galvanised | Yes | 1000 | 25 |
| PZ3050 | 30 - Slot 6 | Black powder coated steel | - | 1000 | 25 |