
Steel Angle

Links two aluminium profiles at a right angle.


Note: To install the ESD-ready angles, use a notched slot nut in order to make a conductive link.

Mounting material On-site construction:
Angle 20: M5 × 8 countersunk screw (DIN7991), M5 slot 5 slot nut
Angle 30: M6 × 10 countersunk screw (DIN7991), M6 slot 6 slot nut


System: 30 - Slot 6; 20 - Slot 5
Type: Angles Brackets and Corners; Fasteners

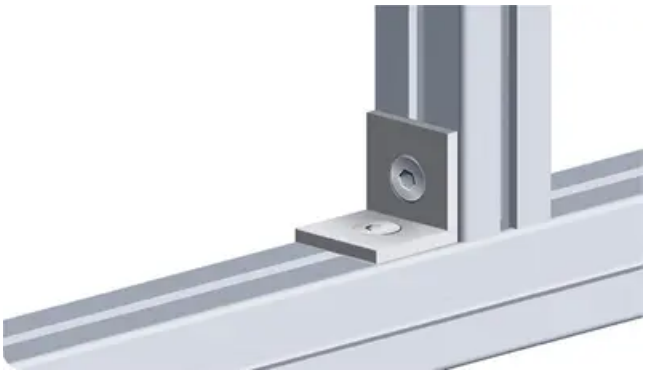

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

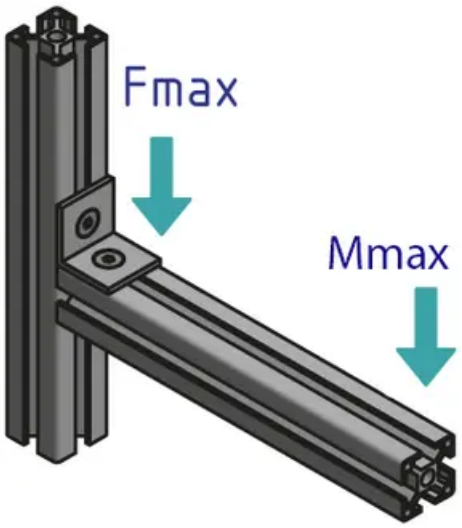

General Data

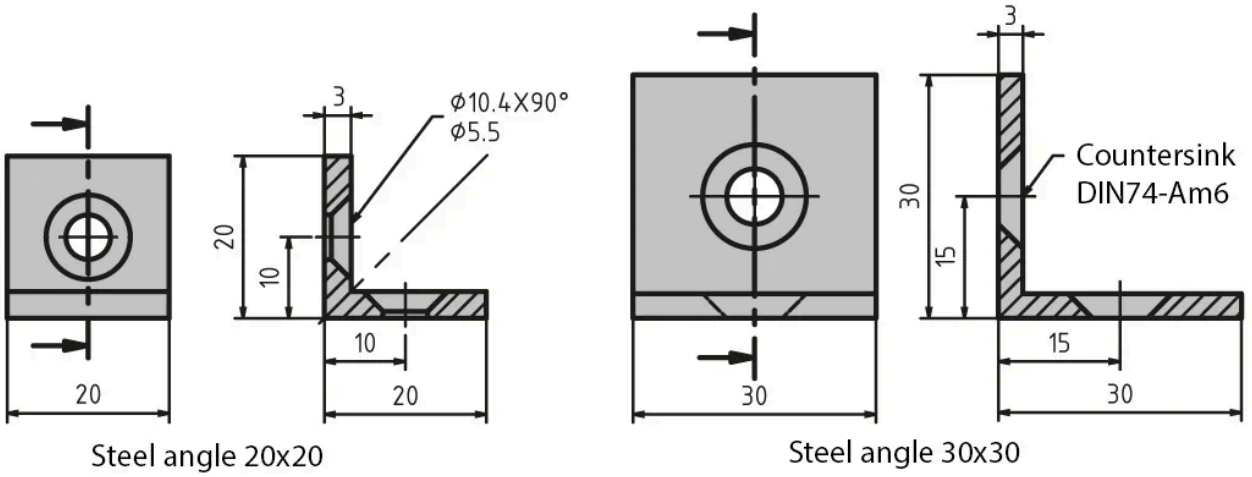

Designation	Description	System	Material	ESD	Fmax (N)
RA4045	Bracket 20 × 20	20 - Slot 5	Black powder coated steel	-	600
RA3060	Bracket 30 × 30	30 - Slot 6	Steel, blue galvanised	Yes	1000
RA3050	Bracket 30 × 30	30 - Slot 6	Black powder coated steel	-	1000

Designation	Mmax (Nm)
RA4045	15
RA3060	25
RA3050	25

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.