Combination Hinge of Die-Cast Aluminium


For surface elements and aluminium profiles
Material: Wing: Die-cast aluminium; pin: Stainless steel
On-site mount: by M6 × 12 or M6 × 16 countersunk screws and slot nuts at the front
Mounting instruction: ESD-ready only if using notched slot nuts.


System: 30 - Slot 6
Type: Hinges




Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.




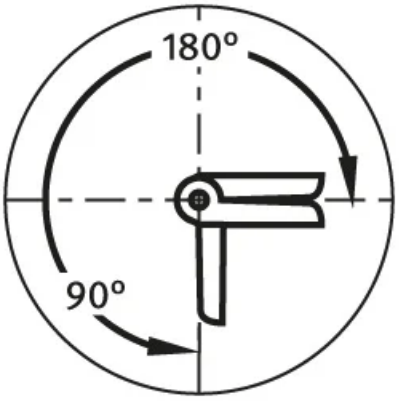

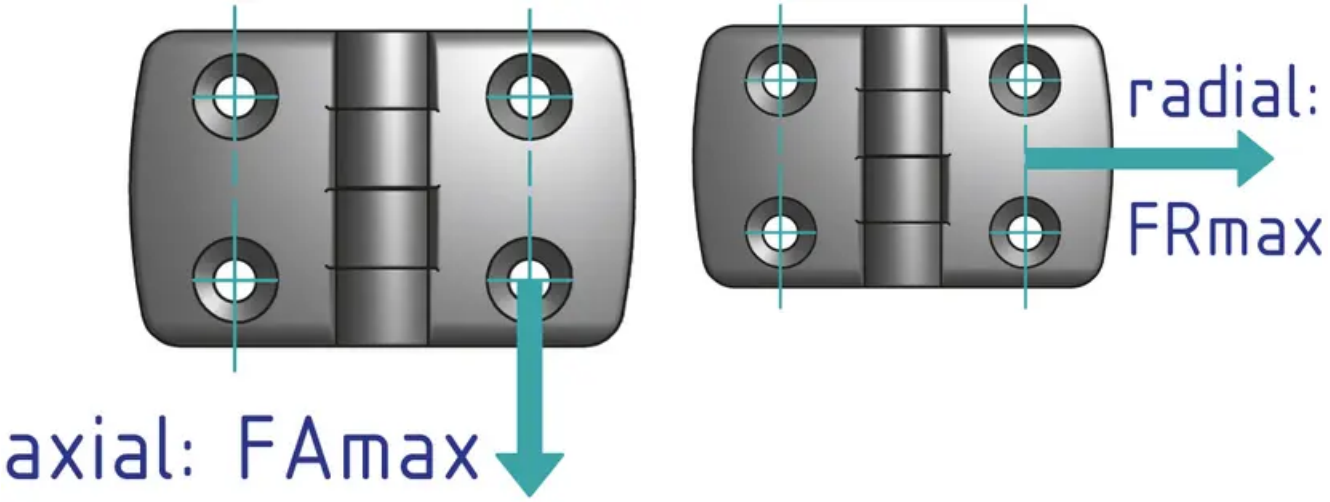

General Data

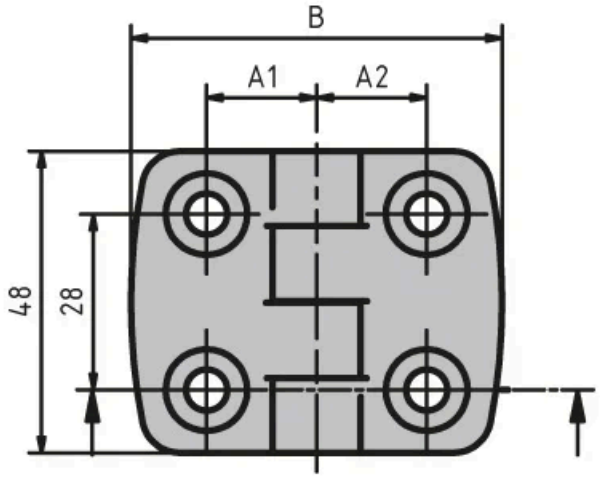

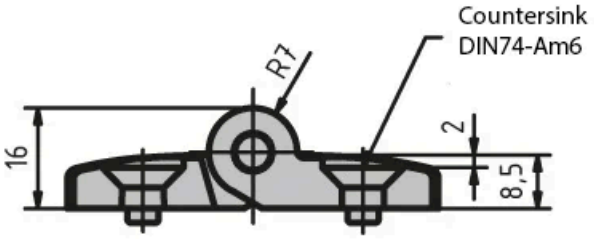

Designation	Description	System	B	FAmax (N)	FRmax (N)
PZ5027	Combination aluminium hinge 30.30	30 - Slot 6	59	225	325
PZ5030	Combination aluminium hinge 60.60	30 - Slot 6	115	100	400

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

Designation	A1/A2
PZ5027	17.5
PZ5030	32.5

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.