Light-Duty Metal Hinge – No Unhinging

For surface elements and aluminium profiles.
Optional adjustment by the oblong holes make this hinge fit for slot rows 5–8.
Once mounted, the surface element pivots by 180°.





Mounting material included:
3 M5 × 8 screws (ISO 7380),
1 M5 × 16 screw (DIN 903),
1 M5 nut (DIN 934),
1 5.3 washer (DIN 125) - black galvanised (RoHS-compliant)


System: 30 - Slot 6; 20 - Slot 5
Type: Hinges


Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.



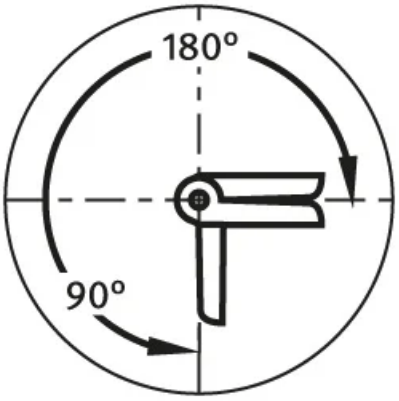

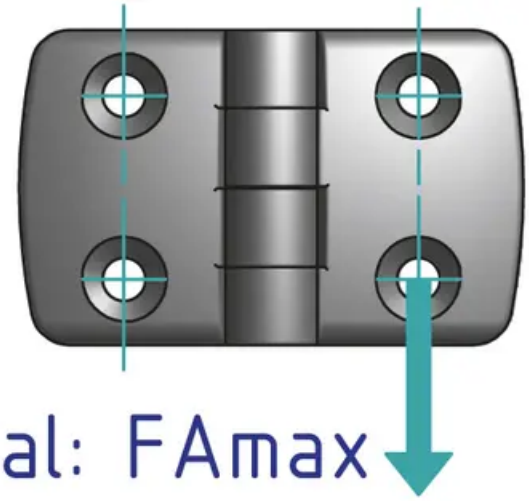


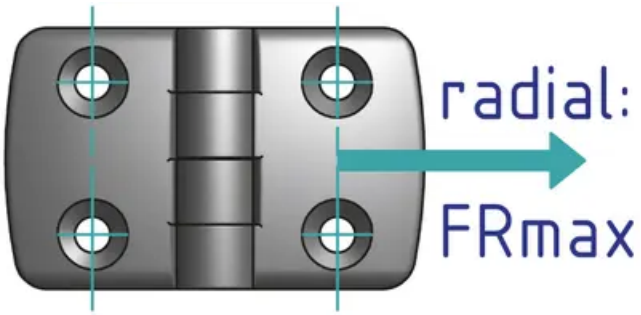

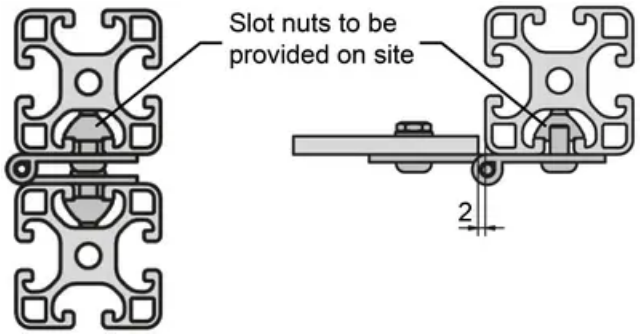

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

General Data

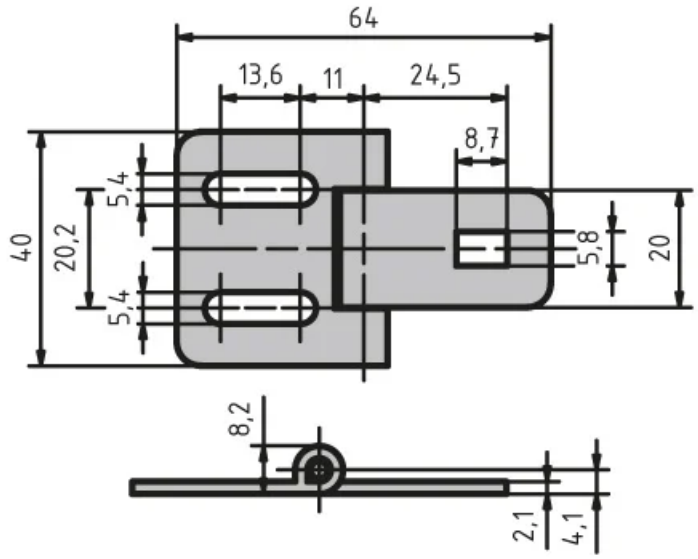

Designation	Material	FAmax (N)	FRmax (N)
PZ1555	Black powder coated steel	250	75

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.