

## Rail

SBTE: Standard zinc plated steel

SXTE: Stainless steel



Special lengths are available upon request. Please contact Rollco for more information.



## General Data

| Designation | Remark                  | Material                   | Weight (kg/m) |
|-------------|-------------------------|----------------------------|---------------|
| SXTE20      | Fixing screws C20-M4x8  | Stainless steel            | 0.47          |
| SXTE30      | Fixing screws C30-M5x10 | Stainless steel            | 0.90          |
| SBTE45      | Fixing screws C45-M8x16 | Standard zinc plated steel | 2.29          |
| SXTE45      | Fixing screws C45-M8x16 | Stainless steel            | 2.29          |

## Dimensions

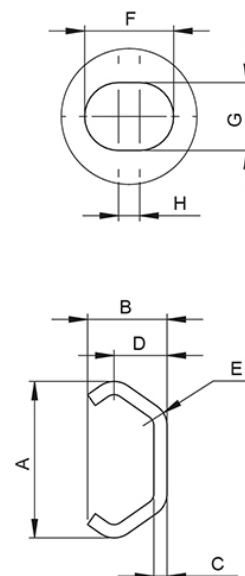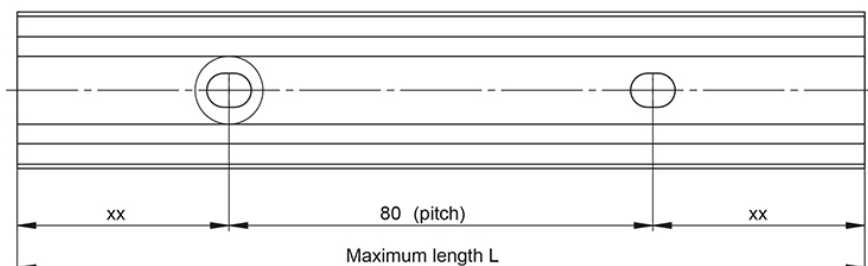

| Designation   | A    | B    | C   | D    | E   | F   | G   | H | L    |
|---------------|------|------|-----|------|-----|-----|-----|---|------|
| <b>SXTE20</b> | 19.2 | 10   | 2   | 7    | 3   | 7   | 5   | 2 | 4000 |
| <b>SXTE30</b> | 29.5 | 15   | 2.5 | 10   | 4.5 | 8.4 | 6.4 | 2 | 4000 |
| <b>SBTE45</b> | 45.7 | 24.5 | 4   | 15.5 | 6   | 11  | 9   | 2 | 6080 |
| <b>SXTE45</b> | 45.7 | 24.5 | 4   | 15.5 | 6   | 11  | 9   | 2 | 6080 |