

Linear Unit CTJ 145

The CTJ series includes linear units with a toothed belt drive and two parallel, integrated, zero-backlash rail guides. In the linear units CTJ is used a pre-tensioned steel reinforced AT polyurethane timing toothed belt. In conjunction with a zero-backlash drive pulley high moments with alternating loads with good positioning accuracy, low wear and low noise can be realized.

The in the profile slot driving timing belt, protects all the parts in the profile from dust and other contaminations. Re-lubrication can be done through maintenance holes on the side of the profile.

Dimensions in mm.



Modulus of Elasticity: E = 70000 N / mm²

Operating Temperature (°C): 0 ~ +60 For operating temperature out of the presented range, please contact Rollco.

Duty Cycle: 100%

Max. Acceleration (m/s²): 70

Max. Travel Speed (m/s): 6

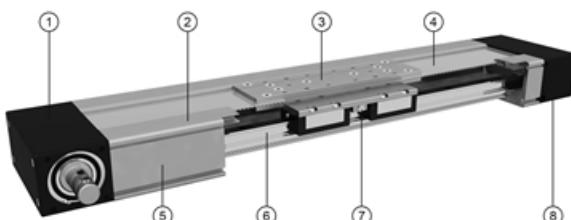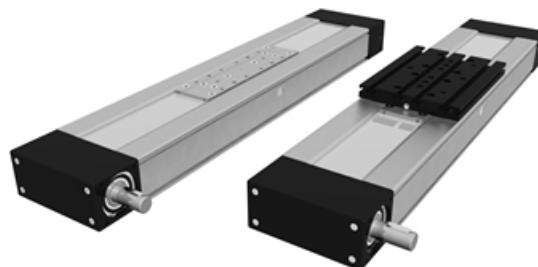


- 1. Drive block with pulley
- 2. Aluminum cover
- 3. Carriage, with built in magnets
- 4. AT polyurethane timing toothed belt with steel tension cords
- 5. Aluminum profile - hard anodized
- 6. Two integrated linear ball guideways
- 7. Central lubrication port, both sides
- 8. Tension end with integrated belt tensioning system

Deflection of the linear unit

CTJ

Fixed - fixed mounting

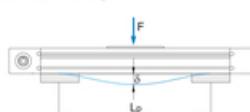

Δ Maximum deflection of the linear unit [mm]
*l*_{max} Maximum permissible deflection of the linear unit [mm]
F Applied force [N]
L_p Unsupported profile length [mm]


Fixed - free mounting




The maximum permissible deflection *l*_{max} must not be exceeded. In the case that maximum deflection *l* exceeds the maximum permissible deflection *l*_{max} additional profile supports are needed.

Deflection of the linear unit

CTJ 145

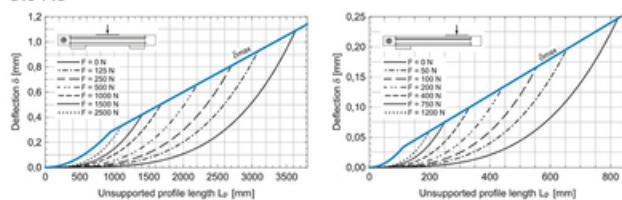


④ The linear units do not include any safety stroke. Absolut stroke = Effective stroke + 2 x safety stroke.

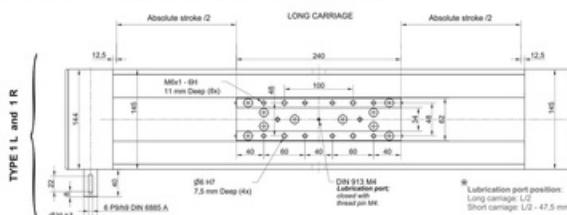


④ Journal with or without keyway. ④ All dimensions in mm. Drawings scales are not equal.

④ The linear units do not include any safety stroke. Absolut stroke = Effective stroke + 2 x safety stroke.

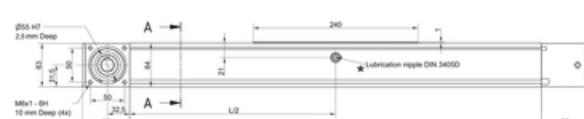

④ Journal with or without keyway. ④ All dimensions in mm. Drawings scales are not equal.


④ The linear units do not include any safety stroke. Absolut stroke = Effective stroke + 2 x safety stroke.

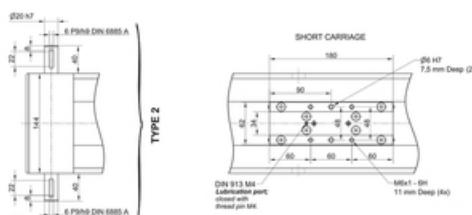

④ Journal with or without keyway. ④ All dimensions in mm. Drawings scales are not equal.




Linear Unit CTJ 145

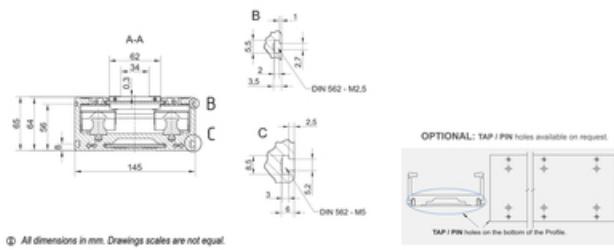

Defining of the linear unit length

$L = \text{Effective stroke} + 2 \times \text{Safety stroke} + L_v + 25 \text{ mm}$

$L_{\text{total}} = L + 138 \text{ mm}$

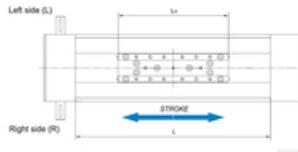

$L_v - \text{Long carriage} = 240 \text{ mm}$
 $L_v - \text{Short carriage} = 180 \text{ mm}$

Double-Carriage


Only with short carriage version.




For ordering code please contact Rolco.

$L = \text{Effective stroke} + 2 \times \text{Safety stroke} + A + 205 \text{ mm}$
 $L_{\text{total}} = L + 138 \text{ mm}$

Connection plate

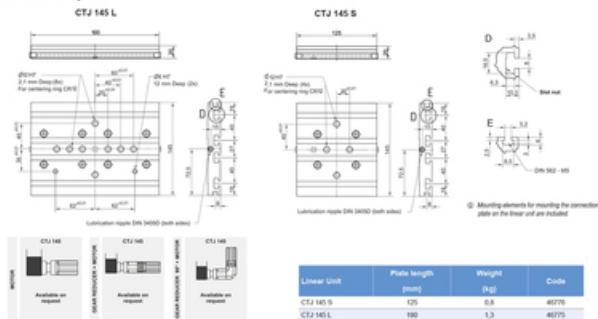

General data

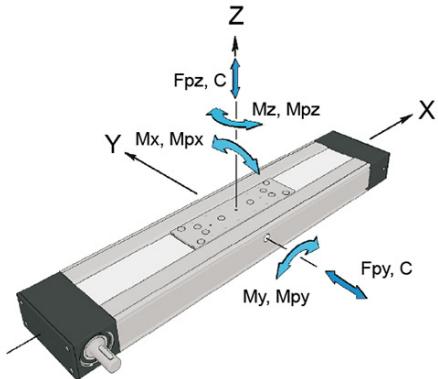

For length/stroke over the stated value, please contact Rollco. Values for max. stroke are not valid for double carriage (equation of defining the linear unit length for particular size of the linear unit needs to be used).

For minimum stroke below the stated value, please contact Rollco.


Recommended values of loads

All the data of static and dynamic moments and load capacities stated are theoretical without considering any safety factor. The safety factor depends on the application and its requested safety.

We recommend a minimum safety factor ($fs = 5.0$).

Designation	Carriage Length Lv (mm)	Dynamic Moment Mx (Nm)	Dynamic Moment My (Nm)	Dynamic Moment Mz (Nm)	Dynamic Load Capacity C (N)
CTJ 145 S	180	1500	260	520	34200
CTJ 145 L	240	3005	3420	3420	68400
Designation	Static Load Capacity C0 (N)	Max. Permissible Loads Forces Fpy (N)	Max. Permissible Loads Forces Fpz (N)	Max. Permissible Loads Moments Mpz (Nm)	Max. Permissible Loads Moments Mpy (Nm)
CTJ 145 S	60000	8930	15320	674	260
CTJ 145 L	120000	17870	30640	1200	1700
Designation	Moved Mass (kg)	Max. Repeatability (mm)	Max. Length Lmax (mm)	Max. Stroke (mm)	Min. Stroke (mm)
CTJ 145 S	1.35	± 0.08	6000	5795	55
CTJ 145 L	2.25	± 0.08	6000	5735	55

General data double carriage

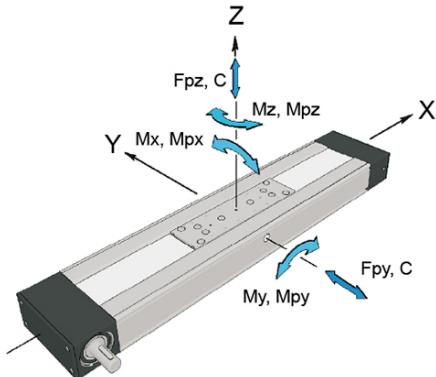

A - Distance between carriages.


Recommended values of loads

All the data of static and dynamic moments and load capacities stated are theoretical without considering any safety factor. The safety factor depends on the application and its requested safety.

We recommend a minimum safety factor ($f_s = 5.0$).

Designation	Carriage version	Dynamic Load Capacity C (N)	Static Load Capacity C0 (N)	Dynamic Moment Mx (Nm)	Dynamic Moment My (Nm)		
CTJ 145 S	S2	68400	120000	3000	34.2 × A (mm)		
CTJ 145 L	S2	68400	120000	3000	34.2 × A (mm)		
Designation		Dynamic Moment Mz (Nm)	Max. Permissible Loads Forces Fpy (N)	Max. Permissible Loads Forces Fpz (N)	Max. Permissible Loads Moments Mpx (Nm)	Max. Permissible Loads Moments Mpy (Nm)	Max. Permissible Loads Moments Mpz (Nm)
CTJ 145 S		34.2 × A (mm)	17860	30630	1350	15.3 × A (mm)	8.9 × A (mm)
CTJ 145 L		34.2 × A (mm)	17860	30630	1350	15.3 × A (mm)	8.9 × A (mm)

Drive data

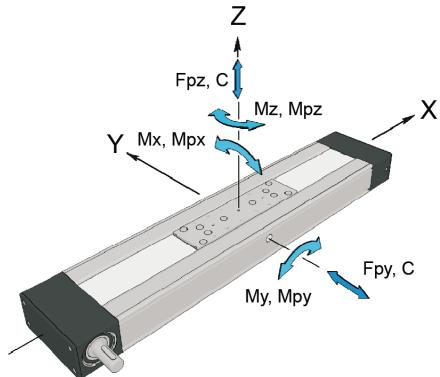

The stated values are for strokes up to 500 mm.
No load torque value increases with stroke elongation.

Max. acceleration (m/s²): 70

For acceleration over the stated value, please contact Rolco.


Mass calculation does not include mass of motor, reduction gear, switches and clamps.

Abs. stroke	Absolute stroke [mm]
A	Distance between carriages [mm]
nc	Number of carriages

Designation	Max. Travel Speed (m/s)	No Load Torque (Nm)	Pulley Drive Ratio (mm/rev)	Pulley Diameter	Belt Type
CTJ 145 S	6	1.48 × nc	165	52.52	AT 5
CTJ 145 L	6	1.50 × nc	165	52.52	AT 5

Designation	Belt Width	Max. Force Transmitted by Belt (N)	Specific Spring Constant Cspec (N)	Max. Drive Torque (Nm)	Planar Moment of Inertia ly (cm ⁴)	Planar Moment of Inertia lz (cm ⁴)
CTJ 145 S	70	1280	1360000	33.6	78.9	707.6
CTJ 145 L	70	1280	1360000	33.6	78.9	707.6

Mass and Mass moment

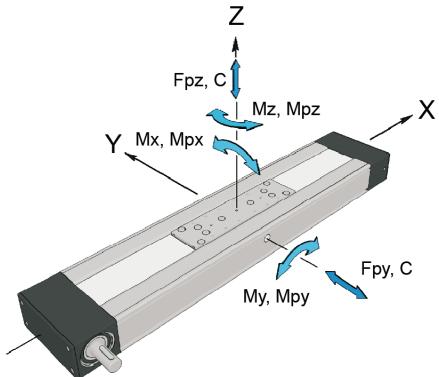

The stated values are for strokes up to 500 mm.
No load torque value increases with stroke elongation.

Max. acceleration (m/s²): 70

For acceleration over the stated value, please contact Rolco.

Mass calculation does not include mass of motor, reduction gear, switches and clamps.

Abs. stroke	Absolute stroke [mm]
A	Distance between carriages [mm]
nc	Number of carriages

Designation	Mass of Linear Unit (kg)	Mass Moment of Inertia (10^{-5} kg m ²)	Planar Moment of Inertia ly (cm ⁴)	Planar Moment of Inertia lz (cm ⁴)	Moved Mass (kg)
CTJ 145 S	$7.2 + 0.0127 \times (\text{Abs. Stroke} + (nc - 1) \times A) + 1.35 \times (nc - 1)$	$145 + 0.0330 \times (\text{Abs. Stroke} + (nc - 1) \times A) + 93.1 \times (nc - 1)$	78.9	707.6	1.35
CTJ 145 L	$8.8 + 0.0127 \times (\text{Abs. Stroke} + (nc - 1) \times A) + 2.25 \times (nc - 1)$	$208 + 0.0330 \times (\text{Abs. Stroke} + (nc - 1) \times A) + 155.2 \times (nc - 1)$	78.9	707.6	2.25

Designation	No Load Torque (Nm)
CTJ 145 S	$1.48 \times nc$
CTJ 145 L	$1.50 \times nc$