


T-Nuts, ball-type, push-in

Application:

T-nut for swiveling into the t-slot. Fits into the t-slot at any point. Held in position by a spring-loaded ball. Raised area fits into the t-slot to stop twisting.

System: 40 - Slot 8

Type: T-nuts

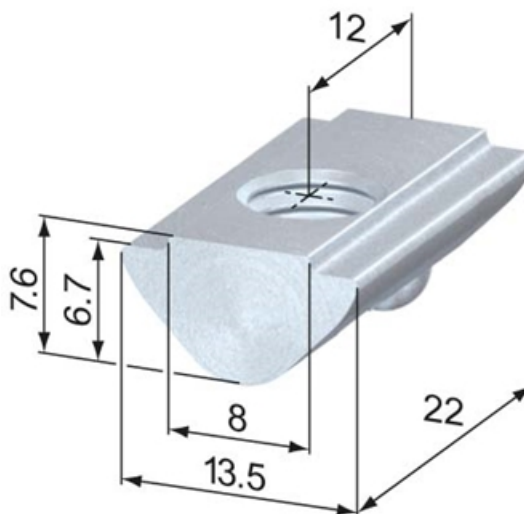

T-Nuts, slide-in



T-Nuts, push-in



T-Slot Strength

Information in regards to the maximum allowable t-slot load capability F. These values already include a safety factor ($S > 2$) against plastic deformation.

Profile type	Max. pull charge F
standard	5000 N
double br.	3250 N
semi	2500 N
light	2000 N
superlight	1750 N



General Data

Designation	System	Material	Thread	Weight (g)
SV2110V	40 - Slot 8	Steel, zinc-plated	M3	12
SV2112V	40 - Slot 8	Steel, zinc-plated	M4	11
SV2114V	40 - Slot 8	Stainless steel	M4	11
SV2100V	40 - Slot 8	Steel, zinc-plated	M5	11
SV2104V	40 - Slot 8	Stainless steel	M5	11
SV2101V	40 - Slot 8	Steel, zinc-plated	M6	10
SV2105V	40 - Slot 8	Stainless steel	M6	10
SV2102V	40 - Slot 8	Steel, zinc-plated	M8	9
SV2106V	40 - Slot 8	Stainless steel	M8	9