

## Adjustable Feet Ø 39

### Application:


Height adjustable foot for leveling machines and structures.  
Any tipping is compensated by a ball and striker pad.

**Material:** Pad: POM, black. Spindle & Hexagon nut SW 17:  
Steel, zinc-plated


**Max. Load (kg):** 150

**System:** 40 - Slot 8; 30 - Slot 6; 20 - Slot 5


**Type:** Feet

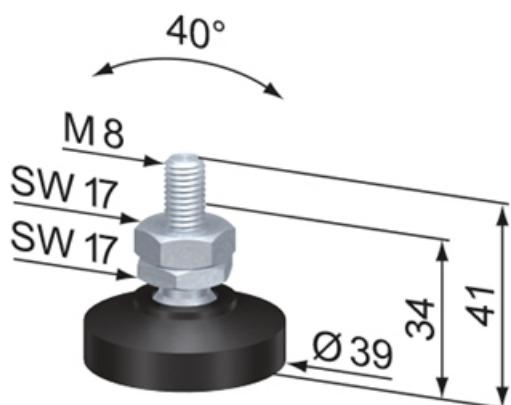

**SF0204S**

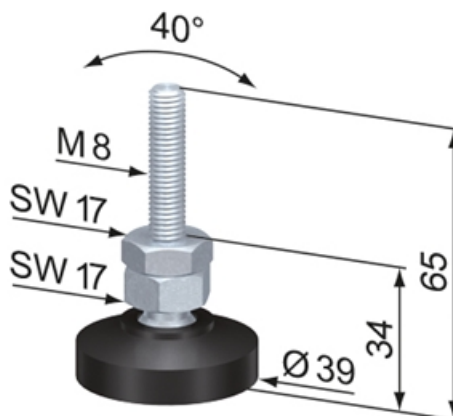

**SF0202S**

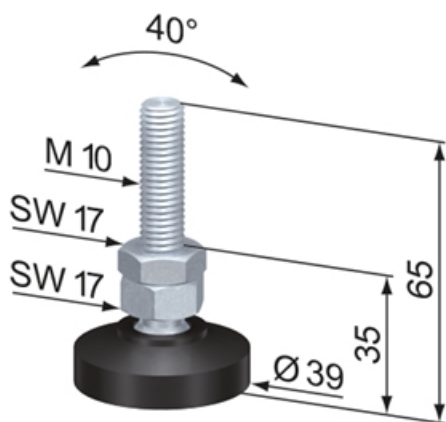

**SF0210S**

## General Data

| Designation | Description                     | Hmin (mm) | Weight (g) |
|-------------|---------------------------------|-----------|------------|
| SF0204S     | Adjustable Foot Ø 39 M8 / L 41  | 34        | 54         |
| SF0202S     | Adjustable Foot Ø 39 M8 / L 65  | 34        | 68         |
| SF0210S     | Adjustable Foot Ø 39 M10 / L 65 | 35        | 75         |