

## Steering Castors, rubber

Application:


For carts with heavy load.

**Material:** Housing: steel, zinc-plated


**System:** 40 - Slot 8

**Temperature range (°C):** -20° to +60°


**Type:** Castors

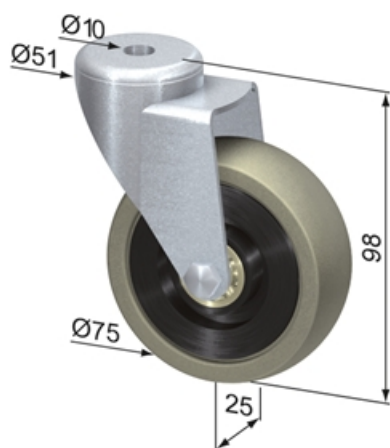


SF2300V

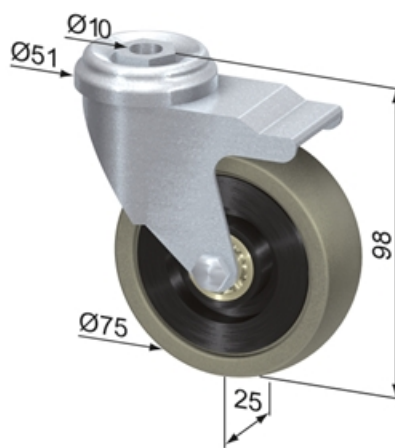

SF2302V

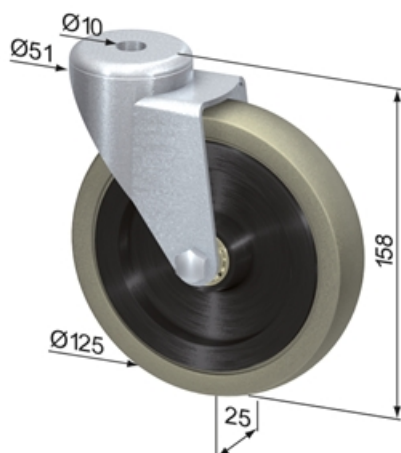

SF2310V

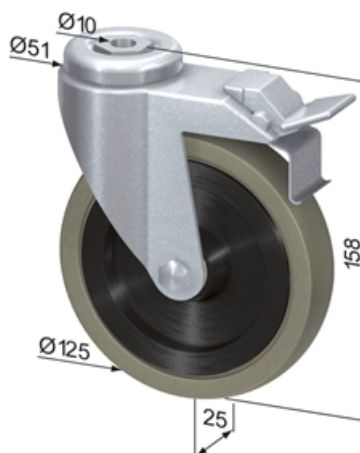

SF2312V

## General Data

| Designation | Description                               | System      | Weight (g) | Max. Load (kg) |
|-------------|-------------------------------------------|-------------|------------|----------------|
| SF2300V     | Steering Castor Ø 75,<br>rubber           | 40 - Slot 8 | 330        | 60             |
| SF2302V     | Steering Castor Ø 75,<br>rubber, fixable  | 40 - Slot 8 | 340        | 60             |
| SF2310V     | Steering Castor Ø 125,<br>rubber          | 40 - Slot 8 | 1100       | 100            |
| SF2312V     | Steering Castor Ø 125,<br>rubber, fixable | 40 - Slot 8 | 1150       | 100            |