Foot Block, Jacking Screws

Application:


Heavy duty fastening of machine frameworks.


Acc.:


SZ1732V: 2x floor anchor M 12 x 115 Two fixing sets SZ1732V are required for portal plates with four jacking screws.


Material: Foot block: aluminium, natural anodized. Jacking screw & Pressure plate: steel, black. System: 40 - Slot 8 Type: Floor Fixing Elements








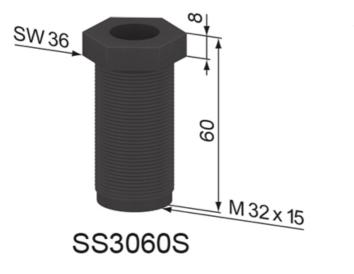



Rollco Oy • Sarankulmankatu 12 • 33900 Tampere • Suomi Puh. +358 207 57 97 90 • info@rollco.fi • Y-tunnus 1806970-0 Page Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice

Foot Block, Jacking Screws



Rollco Oy • Sarankulmankatu 12 • 33900 Tampere • Suomi Puh. +358 207 57 97 90 • info@rollco.fi • Y-tunnus 1806970-0 Page 2 of 3 Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

General Data

Designation	Description	System	Weight (g)
SZ0300V	Foot Block M 32 x 1.5	40 - Slot 8	956
SZ0310S	Pressure Plate 100 x 100 x 10	40 - Slot 8	742
SS3060S	Jacking Screw M 32 x 1.5 60 SW 36	40 - Slot 8	226
SS3100S	Jacking Screw M 32 x 1.5 100 SW 36	40 - Slot 8	363

Rollco Oy • Sarankulmankatu 12 • 33900 Tampere • Suomi Puh. +358 207 57 97 90 • info@rollco.fi • Y-tunnus 1806970-0 Page 3 of 3 Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.