

POSITIONING SYSTEMS



Why positioning systems?

Does your machine require quick format changeovers and reduced down times? With automatic format changeover you benefit from significant time savings, improved quality, and a self-monitoring system which accurately detects unwanted changes in position.

Compared to manual adjustment, automation with our positioning systems offers 3 key benefits:

Time saving

It is possible for production to start in the new format right after the demand. Several axis are adjusted at the same time and there is no need to wait for authorized staff.

Increased quality

A defined format is always adjusted the same way - the position accuracy vary with manual adjustment.


Self-monitoring

When there are unwanted changes to the position, the position correction immediately resets the desired position. Thanks to their self-analysis and early warnings, our positioning systems provide support for predictive maintenance - to improve your machine's availability.

Applications


The positioning devices are typically used in machines for:

- Labelling
- Filling and bottling
- Packaging
- Shearing
- Gluing and sealing
- Wood working

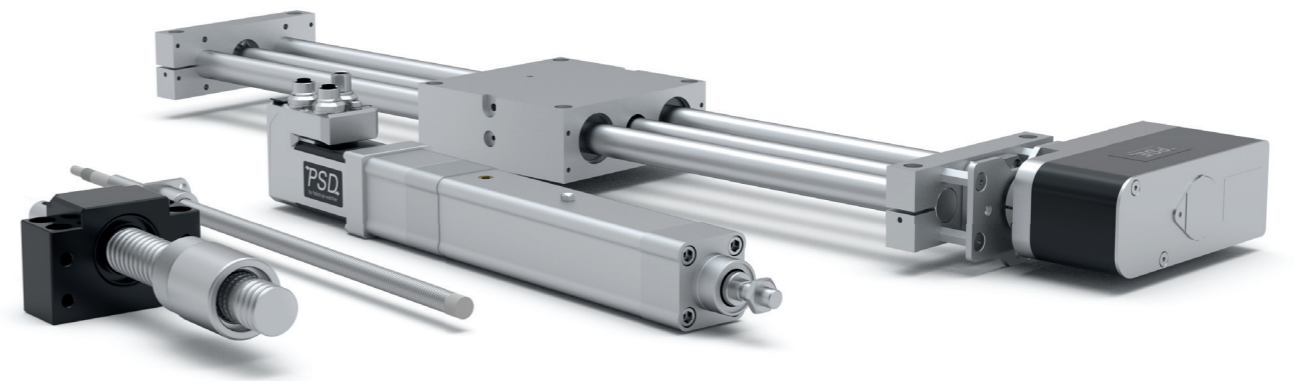

Every care has been taken to ensure the accuracy of the information contained in this catalogue, but no liability can be accepted for any errors or omissions. We reserve the right to make changes without prior notice.

Any reproduction, even partial, is allowed only by written permission by Rollco.



Our solutions



Our positioning systems are ideal for many products in the Rollco range. For example:

- Linear Unit QME
- Ball Screws
- PNCE Electromechanical Cylinders
- Multi-axis systems

In our range we offer two different systems, the PSD- and the PSE/PSS/PSW-series. The PSE/PSS/PSW devices are interchangeable in terms of connection dimensions, but provide different IP protection classes. All positioning systems have compact structure and are available in both horizontal and vertical design.

They include motor, gearbox, absolute encoder and motor control system with a variety of different bus communications along with a wide range of designs and performance characteristics. The PSD direct drives are equipped with stepmotor and the PSE/PSS/PSW brushless EC-motor.

Quick and safe operation

Both systems offer time-saving benefits with adjustment of several axis at the same time. Also, the set up time of the system or a replacement is minimal. The absolute measuring system eliminates the need for time-consuming reference runs and increases the efficiency of the machine. The positioning system always knows its exact position and has 100% repeatability accuracy. It also gives re-regulation of the target position in case of unwanted changes from external forces.

The galvanically separated supply voltages for the control and performance electronics permit the implementation of an emergency shut-off function without interrupting communication with the control module. During an emergency stop it is still possible to read the status and current actual position, which means that you can avoid positioning errors even if the power supply is interrupted.

The PSD series

The PSD direct drives are mechatronic systems with integrated control, bus interface and absolute measurement system without battery. The stepper motor with integrated control and bus communication permits higher velocities at lower torques. This closes the gap on servo drives with regulators. PSD offers a significantly more compact design and simpler wiring as they eliminate the need for an external controller - a cost-effective solution for format changeovers.

The PSD can be easily addressed by rotary switches (not for IO-Link). The unit can be mounted on a spindle using the hollow shaft without the need for an additional coupling. The direct drive is available in both horizontal and vertical design. The optional rotatable attachment housing allows you to attach the direct drives to the machine in any position.



Functions

- Rotary switch for easy addressing of the device (not for IO-Link).
- Optional rotatable housing for attachment in any position.
- No brake required (depending on the application).
- Also available as 1-connector solution (IO-Link).
- Self-monitoring functions covering current, voltage, temperature, and step monitoring with correction for errors.
- Bus communication CANopen, IO-Link, PROFINET, EtherCAT and EtherNet/IP.
- Software features, for example spindle offset run, increased breakaway torque, synchronized run.
- Software modules for IO-Link: changeover of parameter set, target speed in process data and modulo function

PSD range

Models	Type	Output shafts	Nominal torque	Nominal rated speed
PSD 40	Horizontal	<ul style="list-style-type: none"> • 5 mm solid shaft • 8 mm hollow shaft • 14 mm hollow shaft 	0,8 .. 3 Nm	200 .. 50 rpm Peak at 800 rpm
PSD 41	Vertical	<ul style="list-style-type: none"> • 5 mm solid shaft • 8 mm hollow shaft • 14 mm hollow shaft 	0,8 .. 3 Nm	200 .. 50 rpm Peak at 800 rpm
PSD 42	Horizontal	<ul style="list-style-type: none"> • 8 mm solid shaft • 8 mm hollow shaft • 14 mm hollow shaft 	2 .. 8 Nm	200 .. 50 rpm Peak at 1000 rpm
PSD 43	Vertical	<ul style="list-style-type: none"> • 8 mm solid shaft • 8 mm hollow shaft • 14 mm hollow shaft 	2 .. 8 Nm	200 .. 50 rpm Peak at 1000 rpm

Visit our website for product specifications and detailed technical data.

The PSE/PSS/PSW series

The PSE/PSS/PSW positioning systems are intelligent, compact solutions for the automatic adjustment of auxiliary and positioning axis. The product range has high quality brushless EC-motors, which do not wear and drive the positioning system accurately. The integrated electronic control feature frees up the machine's central control unit. No external motors, proximity or limit switches are required.

Address and baud rate switches simplify start-up. The instruments can be mounted on a spindle using the hollow shaft without the need for an additional coupling. Rotative positioning systems for adjusting positioning and auxiliary axis make your production processes more efficient - faster adjustment, fewer standstills and lower rejection rates from the machine.

The three types have different protection classes but interchangeable in terms of their connection dimensions.

- PSE - Protection class IP 54
- PSS - Protection class IP 65 (Stainless steel housing)
- PSW - Protection class IP 68 (Washable)

Functions


- Easy address assignment directly on the device using integrated address switches (not for IO-Link).
- Intelligent running behaviour. Recognises the difference between obstacles and dirt.
- Self-monitoring functions such as condition monitoring of supply voltage, drag error (permits optimum adjustment of current position), power consumption and torque.
- 10 types of Bus communication systems.
- Software features, for example spindle offset run, limiting torque, synchronized run.
- Fast and simple set up with jog keys as add-on option and address selection switches.

Safe torque off (STO)

The PSE/PSS/PSW-series have a partial safety function for STO. The function corresponds to an emergency stop function. When STO is activated the positioning system actively generates no more torque. To fulfil the safety function, further components are required.

Levels of STO signals

STO low <5V ⇒ STO is activated (e.g. ground/OV)
 STO high >15V ⇒ Normal working condition (e.g. 24 VDC/over supply)

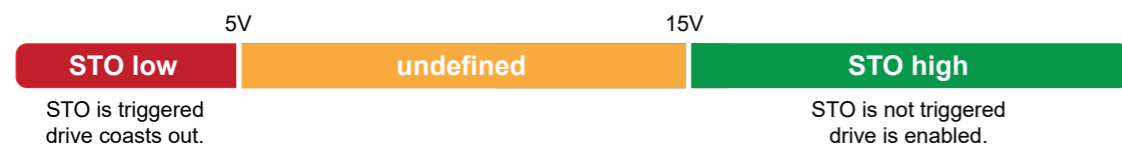

If STO is activated the system does not receive any drive commands.



PSE range

Models	Type	Output shafts	Nominal torque	Nominal rated speed
PSE 30	Horizontal	• 8 mm hollow shaft • 14 mm hollow shaft	1 .. 5 Nm	210 .. 40 rpm
PSE 31	Vertical	• 8 mm hollow shaft • 14 mm hollow shaft	1 .. 5 Nm	210 .. 40 rpm
PSE 32	Horizontal	• 14 mm hollow shaft	1 .. 18 Nm	210 .. 17 rpm
PSE 33	Vertical	• 14 mm hollow shaft	1 .. 25 Nm	210 .. 10 rpm
PSE 34	Horizontal	• 14 mm hollow shaft	10 .. 18 Nm	60 .. 80 rpm

PSS range

Models	Type	Output shafts	Nominal torque	Nominal rated speed
PSS 30	Horizontal	• 8 mm solid shaft • 8 mm hollow shaft • 14 mm solid shaft • 14 mm hollow shaft	1 .. 5 Nm	210 .. 40 rpm
PSS 31	Vertical	• 8 mm solid shaft • 8 mm hollow shaft • 14 mm solid shaft • 14 mm hollow shaft	1 .. 5 Nm	210 .. 40 rpm
PSS 32	Horizontal	• 14 mm solid shaft • 14 mm hollow shaft	1 .. 18 Nm	210 .. 17 rpm
PSS 33	Vertical	• 14 mm solid shaft • 14 mm hollow shaft	1 .. 5 Nm	210 .. 68 rpm

PSW range

Models	Type	Output shafts	Nominal torque	Nominal rated speed
PSW 30	Horizontal	• 8 mm solid shaft • 8 mm hollow shaft • 14 mm solid shaft • 14 mm hollow shaft	1 .. 5 Nm	180 .. 35 rpm
PSW 31	Vertical	• 8 mm solid shaft • 8 mm hollow shaft • 14 mm solid shaft • 14 mm hollow shaft	1 .. 5 Nm	180 .. 35 rpm
PSW 32	Horizontal	• 14 mm solid shaft • 14 mm hollow shaft	1 .. 18 Nm	180 .. 14 rpm
PSW 33	Vertical	• 14 mm solid shaft • 14 mm hollow shaft	1 .. 5 Nm	180 .. 50 rpm


Visit our website for product specifications and detailed technical data.

Automatic format changes


These days machines and plants require minimal set-up times. Conversion is therefore automated more often.

More and more bottlers are, for instance, demanding high flexibility when it comes to changing bottle formats. Example; after small round ones, a quick changeover must be made to tall square bottles.

When a machine is converted, many objects are positioned on adjustment axes in the entire process: guide rails, labelers and inspection cameras. Our positioning systems adjust these axes to the new position in the control unit immediately after the demand – quickly and precisely.

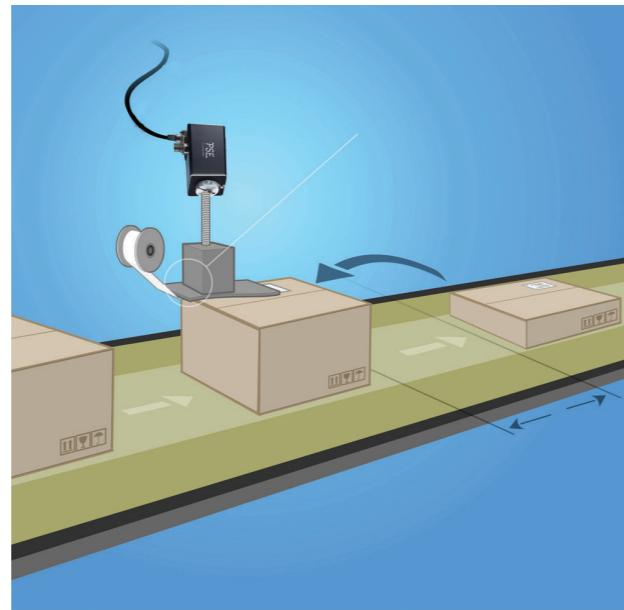

Gain time and avoid errors with automated changeovers

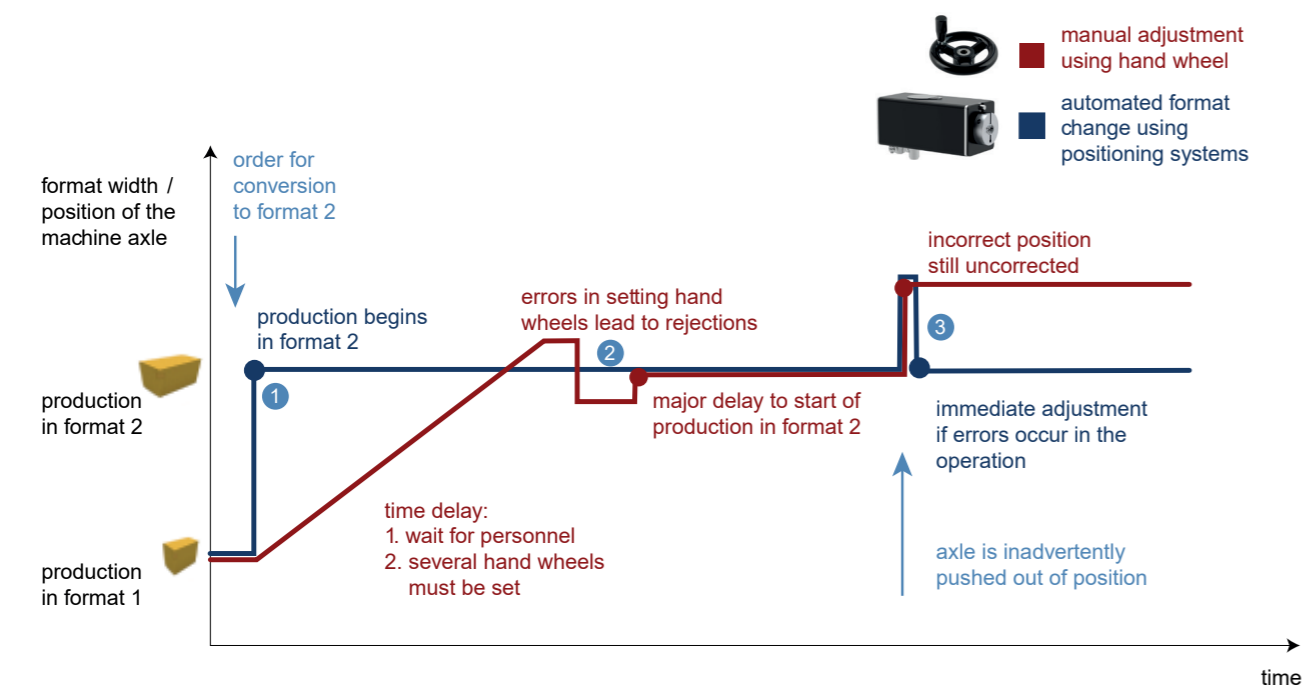


Finding the right product

Performance curves


The positioning systems cover a performance range which is ideal for frequent format changes. If you already know your torque / speed range and these performance curves can help you select the appropriate model.

Please note that the performance curves show the nominal torque/nominal rated speed combinations for the different positioning systems. They are intended to provide an initial guide and enable you to find the correct positioning systems based on the required torque range.


PSD-series

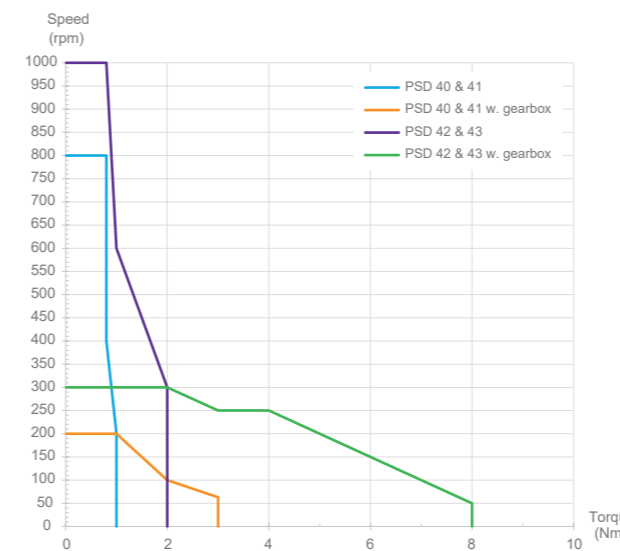


PSE-series

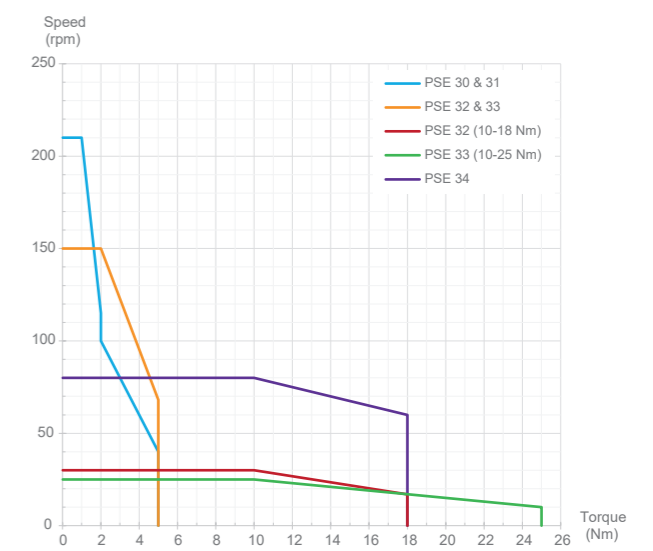

PSS-series

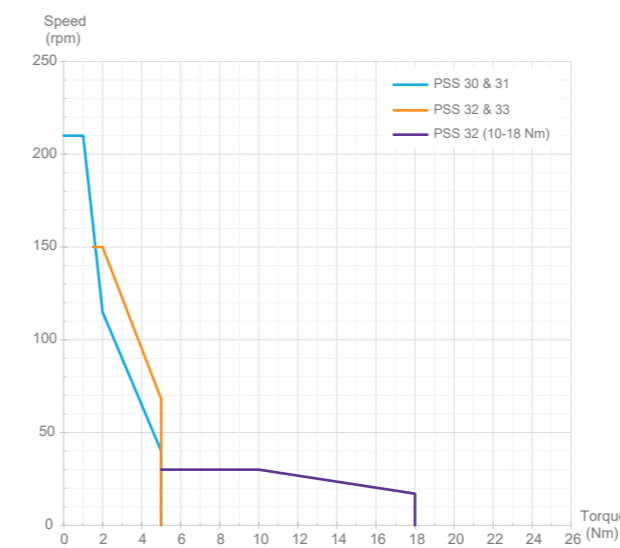

PSW-series

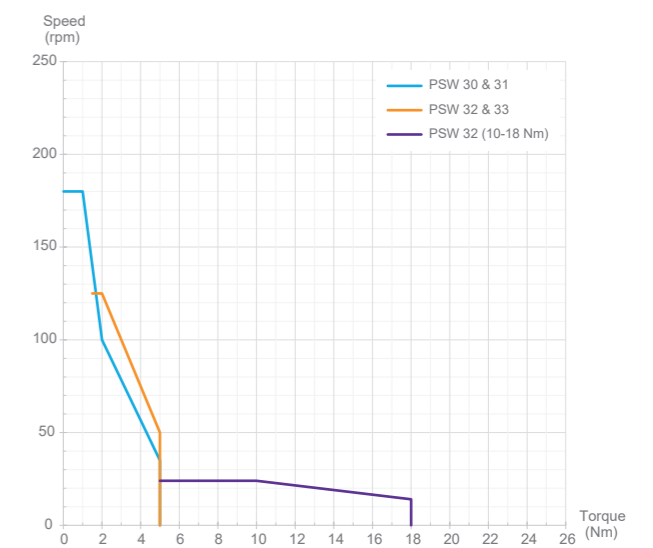

Calculate the torque

Do you know the mass to be positioned and are looking for the appropriate torque when making a vertical adjustment? The following calculation allows you to calculate the approx. torque required. Note that it does not consider the torque requirement by friction in sliding parts.

$$\text{Torque } M \text{ [Nm]} = \frac{m \text{ [kg]} \times s \text{ [mm]}}{630} \times T$$

(if unknown)

m = Mass
s = Spindle pitch
T = 1.1 for ball screw spindle
= 3.3 for trapezoidal threaded spindle


Example:

Mass: 50 kg
Spindle pitch: 4 mm,
Trapezoidal threaded spindle

$$\text{Torque } M \text{ [Nm]} = \frac{50 \text{ kg} \times 4 \text{ mm}}{630} \times 3.3 \text{ Nm} = 1.04 \text{ Nm}$$

Result:

A positioning system with 2 Nm torque should be selected. (30% reserve).

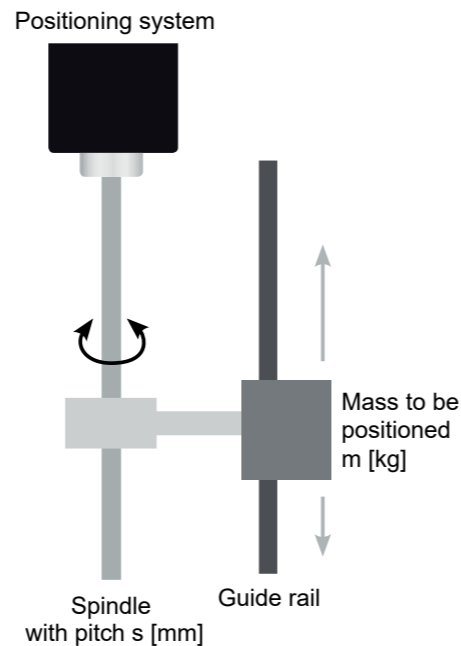

For dry, damp or wet areas — we have the right solution for you

Many machines are used under normal manufacturing conditions and therefore require no additional moisture protection for the positioning system. Good resistance to dust is far more important. For applications such as these, standard devices with the protection class IP 54 are an ideal solution.

Hygienic applications in the food processing and pharmaceutical sectors as well as other critical applications require a higher protection class. This is achieved by using more resistant materials (e.g. stainless steel) and suitably designed seals. These measures are relevant to the overall cost of the solutions, so we offer devices in both the IP 65 and IP 68 segments.

Protection Class	PSD-series	PSE-series	PSS-series	PSW-series
IP 50	Standard	-	-	-
IP 54	-	Standard	-	-
IP 65	Optional	Optional	Standard	-
IP 68	-	-	-	Standard

The appropriate bus system for your machine


To be able to offer a high level of flexibility in the range of bus communication standards to meet the wishes of the machine's user.

Bus communication	PSD-series	PSE-series	PSS-series	PSW-series
CANopen (CA)	Yes	Yes	Yes	Yes
PROFIBUS (DP)	No	Yes	Yes	Yes
DeviceNet (DN)	No	Yes	Yes	Yes
Modbus RTU (MB)	No	Yes	Yes	Yes
Sercos (SE)	No	Yes	Yes	Yes
EtherCAT (EC)	Yes	Yes	Yes	Yes
PROFINET (PN)	Yes	Yes	Yes	Yes
EtherNet/IP (EI)	Yes	Yes	Yes	Yes
POWERLINK (PL)	No	Yes	Yes	Yes
IO-Link (IO)	Yes	Yes	Yes	Yes


Mechanical adaptations with minimal effort

The output shaft of the positioning system has to be adapted to the application. A hollow shaft with an adjustable collar has proven itself an effective and reliable solution for this task. Torque support is also very easily implemented using a pin. This eliminates the need for a coupling with intermediate flange. This saves additional costs, assembly time and space.

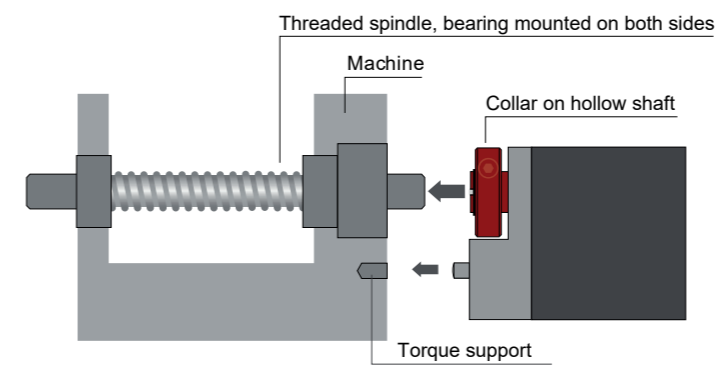











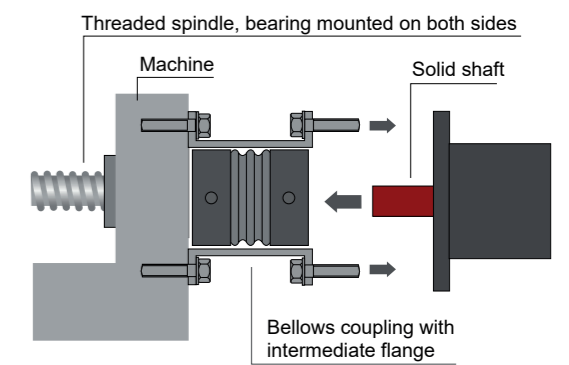




Mounting with hollow shaft



Mounting with solid shaft and coupling



Compare the systems

	PSD 40	PSD 41	PSD 42	PSD 43	PSE 30	PSE 31	PSE 32	PSE 33	PSE 34	PSS 30	PSS 31	PSS 32	PSS 33	PSW 30	PSW 31	PSW 32	PSW 33
Type	Horizontal 	Vertical 	Horizontal 	Vertical 	Horizontal 	Vertical 	Horizontal 	Vertical 	Horizontal 	Horizontal 	Vertical 	Horizontal 	Vertical 	Horizontal 	Vertical 	Horizontal 	Vertical 
Protection class	IP 50 (optional IP 65)				IP 54 (optional IP 65)				IP 65	IP 65 ¹⁾				IP 68 ²⁾			
Bus communication ³⁾	CA, EC, PN, IO, EI				CA, DP, DN, MB, SE, EC, PN, EI, PL, IO				CA, DP, SE, EC, PN, EI, PL, IO	CA, DP, DN, MB, SE, EC, PN, EI, PL, IO				CA, DP, DN, MB, SE, EC, PN, EI, PL, IO			
Motor	Step motor				EC-motor				EC-motor	EC-motor				EC-motor			
Intermittance	Start-up duration up to 50%		Start-up duration up to 30%		30 % (basis time 300 s)			25 % (basis time 300 s)	20% (basis time 300 s)	20 % (basis time 600 s)				20 % (basis time 600 s)			
Nominal torque	0,8 .. 3 Nm	0,8 .. 3 Nm	2 .. 8 Nm	2 .. 8 Nm	1 .. 5 Nm	1 .. 5 Nm	1 .. 18 Nm	1 .. 25 Nm	10 .. 18 Nm	1 .. 5 Nm	1 .. 5 Nm	1 .. 18 Nm	1 .. 5 Nm	1 .. 5 Nm	1 .. 5 Nm	1 .. 18 Nm	1 .. 5 Nm
Self-holding torque	1/2 nominal torque				0.5 .. 12.5 Nm				5 .. 9 Nm ⁴⁾	0.5 .. 9 Nm				0.5 .. 9 Nm			
Nominal rated speed	200 .. 50 rpm Peak at 800/1000 rpm				210 .. 40 rpm		210 .. 17 rpm	210 .. 10 rpm	60 .. 80 rpm	210 .. 40 rpm		210 .. 17 rpm	210 .. 68 rpm	180 .. 35 rpm		180 .. 14 rpm	180 .. 50 rpm
Nominal voltage	24 VDC (± 10 %) Galvanically separated supply voltages between control and motor and bus								24 VDC (± 10 %) Galvanically separated supply voltages between control and motor and bus								
Nominal current (A)	2.0 A		4.0 A		PSE30_-8 2.2 A PSE30_-14 2.4 A PSE 31_-8 2.2 A PSE 31_-14 2.4 A	3.1 A		7.8 A	PSS 30_-8 2.2 A PSS 30_-14 2.4 A PSS 31_-8 2.2 A PSS 31_-14 2.4 A	PSS 32_-14 3.1 A PSS 3210-14 2.2 A PSS 3218-14 2.2 A PSS 33_-14 3.1 A	PSW 30_-8 2.2 A PSW 30_-14 2.4 A PSW 31_-8 2.2 A PSW 31_-14 2.4 A	PSW 32_-14 3.1 A PSW 3210-14 2.2 A PSW 3218-14 2.2 A PSW 33_-14 3.1 A					
Output shaft	5 mm solid shaft 8 mm hollow shaft 14 mm hollow shaft		8 mm solid shaft 8 mm hollow shaft 14 mm hollow shaft		8 mm hollow shaft 14 mm hollow shaft		14 mm hollow shaft	14 mm hollow shaft	8 mm solid shaft 8 mm hollow shaft 14 mm solid shaft 14 mm hollow shaft	14 mm solid shaft 14 mm hollow shaft		8 mm solid shaft 8 mm hollow shaft 14 mm solid shaft 14 mm hollow shaft		14 mm solid shaft 14 mm hollow shaft			
Measurement system ⁵⁾	Absolute without battery				Absolute, optical-magnetic				Absolute, optical-magnetic	Absolute, optical-magnetic				Absolute, optical-magnetic			
Positioning range	986 .. 4026 rotations		977 .. 4026 rotations		250 rotations ⁶⁾				250 rotations ⁶⁾	250 rotations ⁶⁾				250 rotations ⁶⁾			
Jog keys	No				Optional via jog key contacts ⁷⁾				Optional via jog key contacts ⁸⁾	Optional via jog key contacts ⁷⁾				Optional via jog key contacts ⁷⁾			
Accuracy	± 0.7° for versions with gearbox ± 1.8° for versions without gearbox				± 0.9°				± 0.9°	± 0.9°				± 0.9°			
Manual adjustment	No				Standard, only possible with 14 mm output shaft				Standard	Standard, only possible with 14 mm output shaft				Standard, only possible with 14 mm output shaft			
Brake ⁹⁾	No				Optional (holding brake) for 14 mm output shaft				Optional (friction brake)	Optional (holding brake) for 14 mm output shaft				Optional (holding brake) for 14 mm output shaft			
STO	No				Yes				Yes	Yes				Yes			

¹⁾ Under installed and wired conditions

²⁾ IP 68 at standstill, IP 66 during rotation (tested with water)

³⁾ See p. 11 for bus abbreviations

⁴⁾ With current

⁵⁾ Generally without battery, therefore maintenance-free

⁶⁾ Without mechanical limitation

⁷⁾ Not for PSW or IO-Link, always via an extra connector

⁸⁾ Not for CANopen





⁹⁾ Please contact us for brake selection



Order Code - Positioning System PSD

41 - 3-14H - 2 - CA - 0 - 50 - 1 - 0

Type

- 40: Horizontal 
- 41: Vertical 
- 42: Horizontal 
- 43: Vertical 

Torque (see table)

- 1 Nm
- 2 Nm
- 3 Nm
- 6 Nm
- 8 Nm

Output shaft ø mm (see table)

- 5
- 8
- 14

Shaft type (see table)

- V: Solid
- H: Hollow

Rotation shaft / Housing (see table)

- S: Direct or 0°
- 1: 90°
- 2: 180°
- 3: 270°

Bus communication

- CA: CANopen
- IO: IO-Link
- PN: PROFINET
- EC: EtherCAT
- EI: EtherNet / IP

Electrical connections

- 0: Standard²

Protection class

- 50: IP50
- 65: IP65³

Software modules

- 1: Standard
- M: With modulo function⁴
- S: With changeover of parameter set⁴
- P: With target speed in process data⁴
- Z: With modulo function and changeover of parameter set and target speed in process data⁴

Certificates

- 0: CE + UKCA

¹ For CANopen and IO-Link, others on request.

² Standard equipment: 3 plugs / sockets with IO-Link: 1 plug.

³ IP 65 installed (motor shaft IP 50).

⁴ Only for IO-Link devices.

Type PSD 40 & 41

Key		Torque	Output shaft	Rotation shaft / Housing
1-5V	Direct	1 = 0,8 Nm	5V = 5 mm solid shaft	S: Direct or 0°
1-8H 1-14H	Direct	1 = 0,8 Nm	8H = 8 mm hollow shaft 14H = 14 mm hollow shaft	S: Direct or 0° 1: 90° 2: 180° 3: 270°
3-8H 3-14H	With gearbox	3 = 3 Nm	8H = 8 mm hollow shaft 14H = 14 mm hollow shaft	S: Direct or 0° 1: 90° 2: 180° 3: 270°

Type PSD 42 & 43

Key		Torque	Output shaft	Rotation shaft / Housing
2-8V	Direct	2 = 2 Nm	8V = 8 mm solid shaft	S: Direct or 0°
2-8H 2-14H	Direct	2 = 2 Nm	8H = 8 mm hollow shaft 14H = 14 mm hollow shaft	S: Direct or 0° 1: 90° 2: 180° 3: 270°
6-14H	With gearbox	6 = 6 Nm	14H = 14 mm hollow shaft	S: Direct or 0° 1: 90° 2: 180° 3: 270°
8-14H	With gearbox	8 = 8 Nm	14H = 14 mm hollow shaft	S: Direct or 0° 1: 90° 2: 180° 3: 270°






Order Code - Positioning System PSE/PSS/PSW

PSE - 302-8V - CA - 0 - 0 - 0 - 54

Design

PSE (Efficient)
PSS (Stainless)
PSW (Washable)

Type

30: Horizontal 
31: Vertical 
32: Horizontal 
33: Vertical 
34: Horizontal¹ 

Torque (see table)

1 Nm
2 Nm
5 Nm
10 Nm
18 Nm
25 Nm¹

Output shaft ø mm (see table)

8
14

Shaft type (see table)

V: Solid¹⁰
H: Hollow

Bus communication

CA: CANopen EC: EtherCAT
DP: PROFIBUS DP PN: PROFINET
DN: DeviceNet² EI: EtherNet/IP
MB: Modbus RTU² PL: POWERLINK
SE: Sercos IO: IO-Link

Electrical connections

O: Standard
T: Standard with jog keys^{3,4}
Y: Plug-in, Y-encoded²
Z: Plug-in, Y-encoded with jog keys^{2,3}

Brake

O: Without
M: With⁵

Certification

O: CE
N: NRTL + CE
S: STO + CE without test pulses⁶
T: STO + CE with test pulses⁶
Y: STO + NRTL without test pulses⁶
Z: STO + NRTL with test pulses⁶

Protection class

54: IP54⁷
65: IP65⁸
68: IP68⁹

- ¹ Only for PSE.
- ² Not for PSE 34.
- ³ Not for PSE 31.
- ⁴ Always via an extra connector plug, not for IO-Link or PSW.
- ⁵ Only 14 mm output shafts
- ⁶ Only for IP 65. Not for PSE 34. Only for EtherCAT, PROFINET, EtherNet / IP, only on request.
- ⁷ Only for PSE, PSE 34, only IP 65.
- ⁸ For PSS. For PSE 30 / 31 / 32 / 33 on request.
- ⁹ Only for PSW
- ¹⁰ Not available for PSE

Standard equipment (connections)

- Always provided with 3 plugs/sockets (not for IO-Link or Y-encoded connector)
- Address switches always provided (also IE-buses, not for IO-Link)

Design	Key	Torque	Output shaft
PSE PSS PSW	1-8	1 = 1 Nm 2 = 2 Nm 5 = 5 Nm	8 = 8 mm hollow shaft
	2-8		8V = 8 mm solid shaft
	5-8		8H = 8 mm hollow shaft
	1-14		14 = 14 mm hollow shaft
	2-14		14V = 14 mm solid shaft
PSE PSS PSW	5-14	5 = 5 Nm	14H = 14 mm hollow shaft
	1-8		8 = 8 mm hollow shaft
	2-8		8V = 8 mm solid shaft
	5-8		8H = 8 mm hollow shaft
	1-14		14 = 14 mm hollow shaft
PSE PSS PSW	2-14	2 = 2 Nm 5 = 5 Nm 10 = 10 Nm 18 = 18 Nm	14V = 14 mm solid shaft
	5-14		14H = 14 mm hollow shaft
	10-14		14 = 14 mm hollow shaft
	18-14		14V = 14 mm solid shaft
	14H = 14 mm hollow shaft		
PSE PSS PSW	2-14	2 = 2 Nm 5 = 5 Nm 10 = 10 Nm 25 = 25 Nm	14 = 14 mm hollow shaft
	5-14		14V = 14 mm solid shaft
	10-14		14H = 14 mm hollow shaft
	25-14		14H = 14 mm hollow shaft
	14H = 14 mm hollow shaft		
PSE	10-14	10 = 10 Nm 18 = 18 Nm	14 = 14 mm hollow shaft
	18-14		14 = 14 mm hollow shaft

**ALWAYS THE RIGHT
SOLUTION AT THE RIGHT TIME.**

ROLLCO
LINEAR SOLUTIONS **YOUR WAY**

With reliability, competence and commitment Rollco rapidly delivers the right solutions and components to create safe and cost-effective automation and linear movement.

Rollco AB
Box 22234
Ekvändan 3
250 24 Helsingborg
Sweden
Tel. +46 42 150040
www.rollco.se

Rollco A/S
Skomagervej 13 E
7100 Vejle
Denmark
Tel. +45 7552 2666
www.rollco.dk

Rollco Oy
Sarankulmankatu 12
33900 Tampere
Finland
Tel. +358 207 57 97 90
www.rollco.fi

Rollco Norge AS
Industrigata 6
3414 Lierstrada
Norway
Tel. +47 32 84 00 34
www.rollco.no

Rollco Taiwan
No. 28, Lane 125, Da-an Road
Shulin District 238
New Taipei City, Taiwan
Tel. +886-2-8687-2726
Fax +886-2-8687-2720
www.rollco-tw.com