


# SN Version 1 with 1 slider

SN - 35 - 290 - 430 - 770 - K1 - NIC

Product type	SN	35	290	430	770	K1	NIC
Size							
Slider length							
Stroke							
Rail length							
Clearance and preload (if deviating from standard)							
Expanded surface protection							

Ordering example 1: SN35-290-430-770

Ordering example 2: SN35-290-430-770-K1-NIC

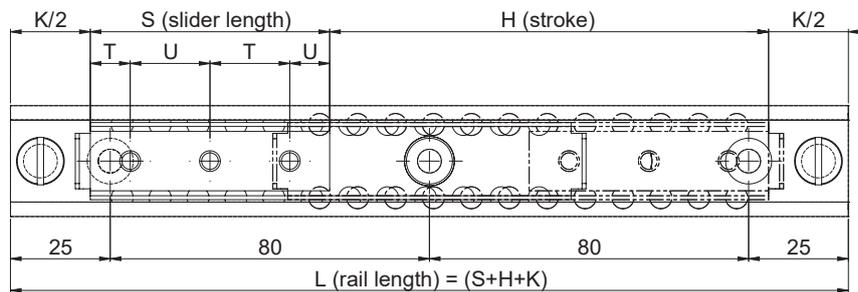

Note: To ensure that all fixing holes of the rail are accessible,  $S$  must be  $< L/2 - K$ . To ensure proper smooth movement it is necessary that  $H \leq 7S$

# SN Version 2 with Multiple Independent Sliders


	SN - 43 - 2 - 290 - 350 - 1330 - G1 - NIC
Product type	
Size	
Number of sliders	
Slider length	
Stroke of the individual sliders	
Rail length	
Clearance and preload (if deviating from standard)	
Expanded surface protection	

Ordering example 1: SN43-2x290-350-1330

Ordering example 2: SN43-2x290-350-1330-G1-NIC

If the individual slider lengths and/or strokes are different, please order according to ordering example 3.

Ordering example 3: SN28-1x200-300/1x250-415-1240

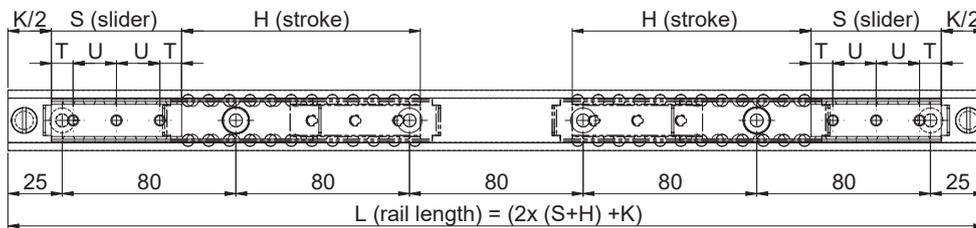

Version 2 is a variant of version 1 with several independent sliders. The total load capacity is based on the number of sliders in the rail and on their lengths.

For systems of versions 2 in size 63 with two independent sliders, the K dimension changes from 80 mm to 110 mm and for each additional slider by another 30 mm.

Note: To ensure that all fixing holes of the rail are accessible, S must be  $< L/2 - K$ . To ensure proper smooth movement it is necessary that  $H \leq 7S$

