ROLLCO LINEAR SOLUTIONS YOUR WAY

Motors for BF40

This is a selection of standard motors available for our BF40 series.


We can customise the drive shaft to accommodate many different motors and gear choices. Please contact Rollco for more information.

Dimensions in mm.

NOTE!


Other motors and frequency converters are available on request. Individual motors are not tested. Motors and gears are not assembled to the unit.




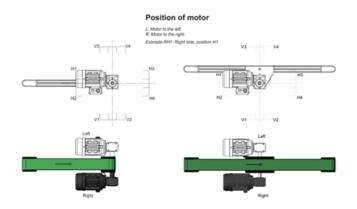


Rollco Oy • Sarankulmankatu 12 • 33900 Tampere • Suomi Puh. +358 207 57 97 90 • info@rollco.fi • Y-tunnus 1806970-0 Page 1 of 2 Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

General Data





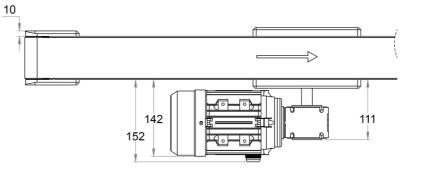

Designation	Voltage (V)	Power (kW)	Frequency (Hz)	Current (A)	Speed (rpm)
MS63A-4	230/400	0.12	50	0.82 / 0.47	1350
MS63B-4	230/400	0.18	50	1.18 / 0.68	1350
MS63C-4	230/400	0.25	50	1.58 / 0.91	1340
ML63B-4	230/400	0.18	50	1.36	1340

Designation	Protection Class	Phase	Code
MS63A-4	IP55	3	1
MS63B-4	IP55	3	2
MS63C-4	IP55	3	3
ML63B-4	IP55	1	4

Rollco Oy • Sarankulmankatu 12 • 33900 Tampere • Suomi Puh. +358 207 57 97 90 • info@rollco.fi • Y-tunnus 1806970-0 Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.